
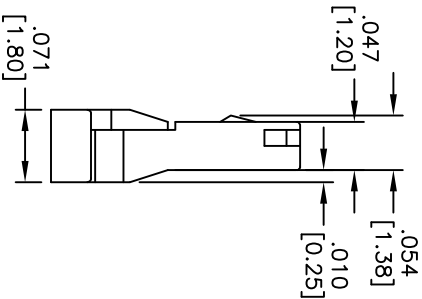
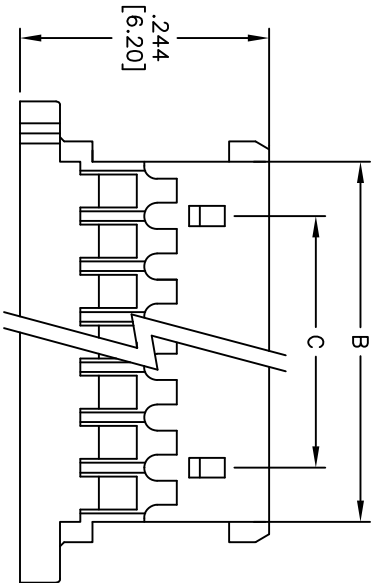


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/10	
A		REVISED SHAPE	6/18/12	

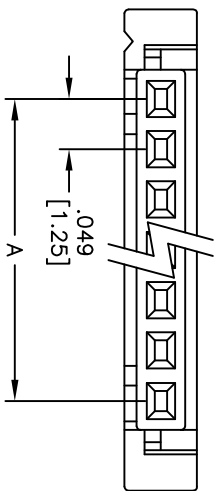

**SPECIFICATIONS:**

**Material:**  
 Insulator: PBT, rated UL 94V-0  
 Insulator color: White

**Electrical:**  
 Voltage rating: 125 VAC/DC max  
 Current rating: 1 Amp max  
 Insulation resistance: 100 Mohms min  
 Dielectric withstanding voltage: 250 VAC for 1 minute

**Temperature Rating:**  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.

Positions: 2 thru 16, 18, 20, 22, 24, 26, 28, 30  
 A = .049 [1.25] X No. of Spaces  
 B = .049 [1.25] X No. of Spaces + .057 [1.45]  
 C = .049 [1.25] X No. of Spaces - .049 [1.25]  
 DIM. C 2P, 3P (NONE)

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .049 [1.25] PITCH CRIMP HOUSING  
 SINGLE ROW, 2 THRU 30 POSITIONS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLE SIZES	
.X	± .10	ØX	± .10		
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE		TITLE	
DRAWN	AY	11/30/10		SIZE	
CHECKED	AH	11/30/10		PART NO.	
APPROVED				125CH-G-XX	
REF: S00723T		SCALE: NTS		SHEET 1 OF 1	



6

5

4

3

2

1