
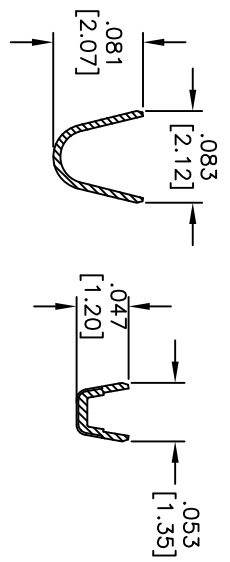

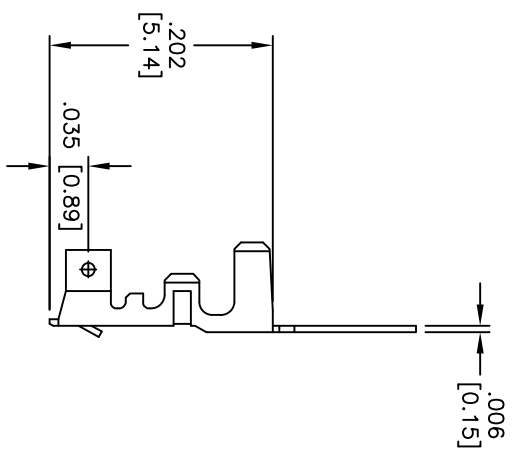


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/14/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

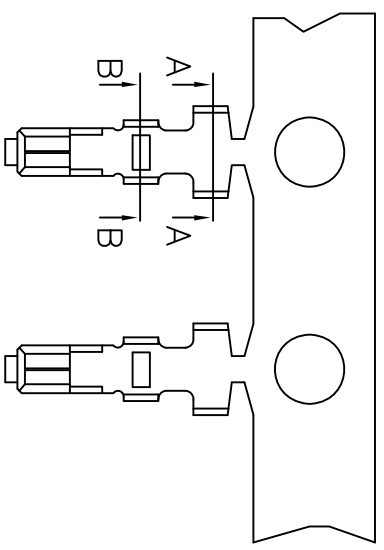

SECTION A-A SECTION B-B

**SPECIFICATIONS:**

- Material: Phosphor Bronze
- Contact: Phosphor Bronze
- Plating: Tin over Copper underplate overall
- Electrical:
  - Operating voltage: 100 VAC max
  - Wire range: 24-30 AWG
  - Current rating: 1.5 Amp max
  - Contact resistance: 20 mohms max
  - Insulation resistance: 500 mohms min.
  - Withstan Voltage: 500V AC/Minute
- Temperature Rating:
  - Operating temperature: -25°C to +85°C
  - Environmental: Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	
DRAWN	AY
CHECKED	AH
APPROVED	
DATE	DATE
4/14/11	4/14/11

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZH 1.5mm TERMINAL, TIN PLATED

SIZE	PART NO.	REV.
X	15CTB-R	-
REF: S00163T	SCALE: NTS	SHEET 1 OF 1