


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/5/10	
A		REDRAWN	2/10/15	AY/GC
B		UPDATED TEMPERATURE RANGE	12/14/17	SS

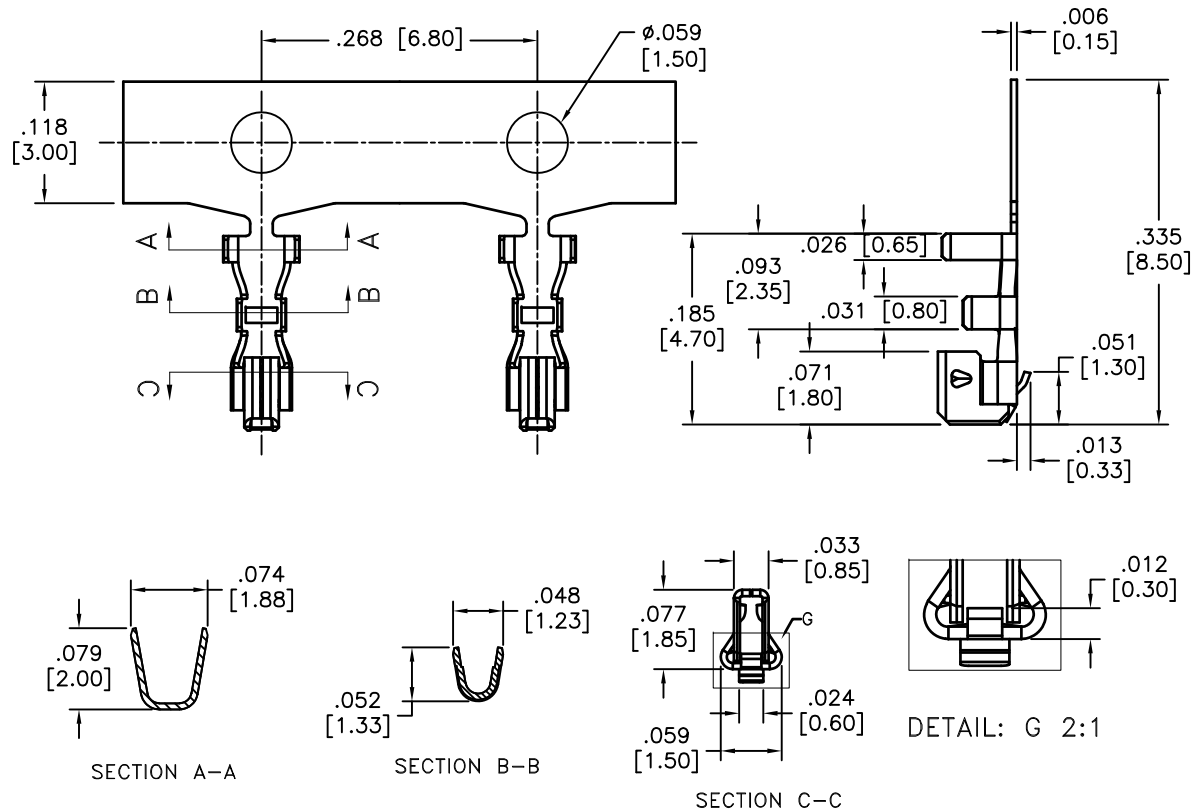

SPECIFICATIONS:

Material: Phosphor Bronze

Plating: Tin Plated

Thickness: 0.15mm

Wire Range: AWG#24~#30

Electrical:

Voltage Rating: 125V AC/DC

Current Rating: 24AWG: 2.0A AC/DC

26AWG: 1.5A AC/DC

28AWG: 1.0A AC/DC

30AWG: 0.5A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
		TITLE CRIMP CONTACT	
APPROVALS		DATE	
DRAWN	AY	11/5/10	
CHECKED	AH	11/5/10	
APPROVED			
SIZE X	PART NO. 2CTG-R	REV. B	
REF: S00124T		SCALE: NTS	SHEET 1 OF 1