
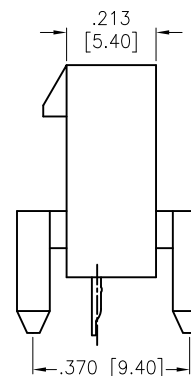
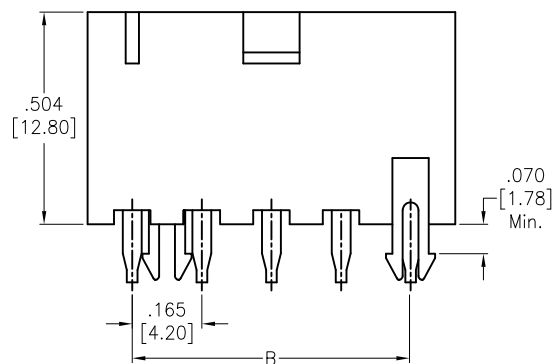
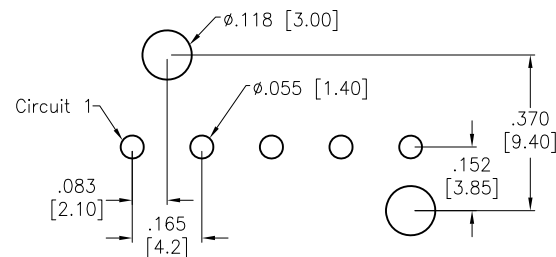


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	02/04/12	
A		UPDATED SPEC.	9/19/16	HR/MC

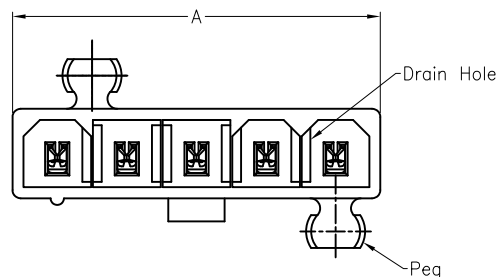

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Natural

contact: Brass, Tin plated

Electrical:

Operating voltage: 600 V(R.M.S)

Current rating (Used #18AWG): 2~3P: 9A, 4~6P: 8A,
7~10P: 7A, 11~12P: 6A.

Contact resistance: 10 mohms Max.

Dielectric withstanding voltage: 1500 VAC for 1 minute

Temperature range:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 12

A= $\phi .165$ [4.20] x No. of Positions + $\phi .047$ [1.20]

B= $\phi .165$ [4.20] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X $\pm .10$ $\phi .X$ $\pm .10$.XX $\pm .020$ $\phi .XX$ $\pm .015$.XXX $\pm .015$ $\phi .XXX$ $\pm .010$				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
APPROVALS DRAWN TW CHECKED CC APPROVED				DATE 02/04/12 02/04/12			
TITLE .165 [4.20] HOUSING, MALE TERMINALS VERTICAL, SINGLE, PCB MOUNT W/ PEGS				SIZE X			
PART NO. DMF-XX-A-VS-T-P-V0				REV. A			
REF: S00123T				SCALE: NTS			
SHEET 1 OF 1							