
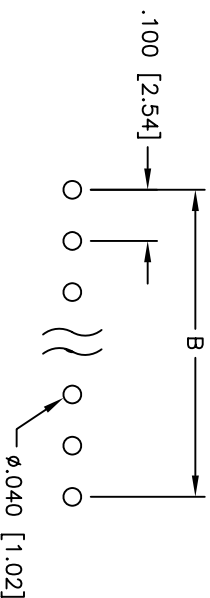
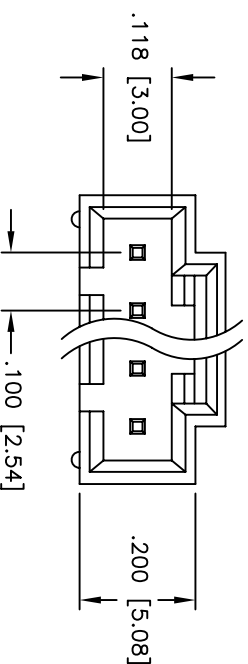
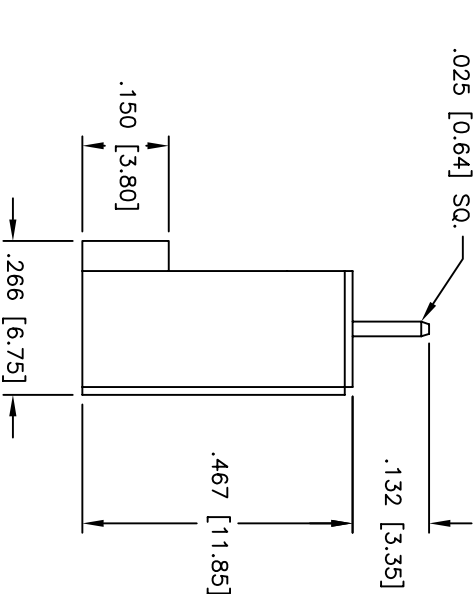


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	

APPROVED: _____

DATE: _____ TITLE: _____

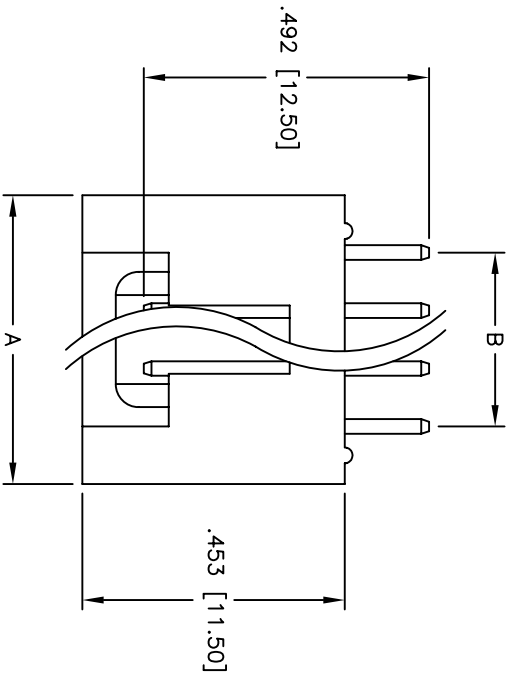

PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: Hi-Temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amps max

Contact resistance: 30 mohms max

Insulation resistance: 1,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds



Positions: 2 thru 12
A = .100 [2.54] x No. of Positions + .100 [2.54]
B = .100 [2.54] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.100 [2.54] LATCHING HEADER

STRAIGHT, PCB, HI-TEMP

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES	HOLES			STRAIGHT, PCB, HI-TEMP			
.X ± .10	ØXX ± .10						
.XX ± .020	ØXXX ± .015						
.XXX ± .015	ØXXX ± .010						
APPROVALS	DATE						
DRAWN	SS	4/7/05					
CHECKED							
APPROVED							

6

5

4

3

2

1