

6

5

4

3

2


1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/13/15	

CUSTOM CABLE ASSEMBLIES ARE NON-CANCELLABLE/NON-RETURNABLE

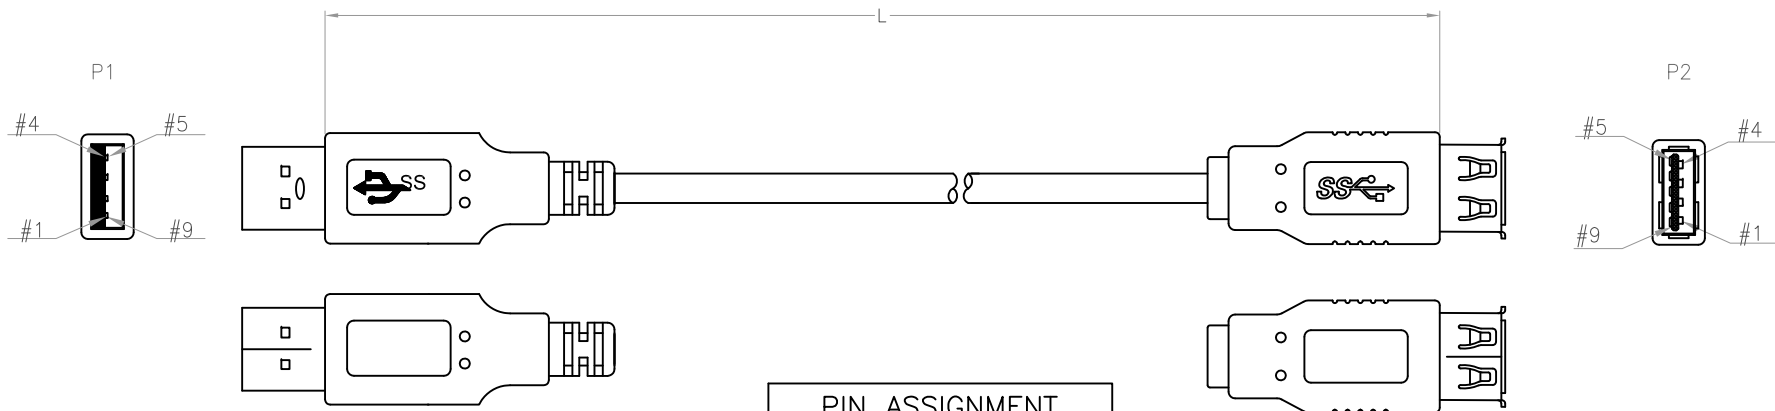

PIN ASSIGNMENT		
P1	P2	
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7		7
8	PURPLE	8
9	ORANGE	9
S	BRAID	S

ADAM P/N	L
CA-USB3-AM/AF-3FT	36.024"±1.181" [915±30mm]
CA-USB3-AM/AF-6FT	72.047"±1.969" [1830±50mm]
CA-USB3-AM/AF-10FT	120.079"±1.969" [3050±50mm]

SPECIFICATIONS:

Connector:

P1= USB 3.0 Connector A type Plug, Gold Flash Plated,
 Insulator Color: Blue, Overmold Color: Blue, 50P PVC
 P2= USB 3.0 Connector A type Socket, Gold Flash Plated,
 Insulator Color: Blue, Overmold Color: Blue, 50P PVC

Cable:

UL20276, (30#*1P+D+A+M)*2C+30#*1P+26#*2C+A+B,
 OD: .189" [4.8mm], Jacket Color Blue.

Electrical Test:

All Assemblies must be 100% Tested for
 Shorts, Open, Continuity, and Physical Appearance.

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		<h1>ADAM TECH</h1> <p>909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710</p>	
INCHES			
.X ± .10	∅X ± .10	TITLE CUSTOM ASSEMBLY, USB 3.0 PLUG TYPE A USB 3.0 SOCKET TYPE A	
.XX ± .020	∅XX ± .015		
.XXX ± .015	∅XXX ± .010	SIZE X	
APPROVALS		PART NO.	
DRAWN	HR	CA-USB3-AM/AF-XFT	
CHECKED	TW	REV.	
APPROVED		-	
DATE		REF: S00087T	
10/13/15		SCALE: NTS	
10/13/15		SHEET 1 OF 1	

6

5

4

3

2

1