
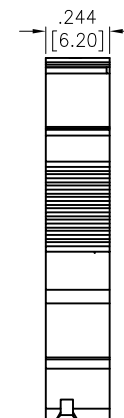
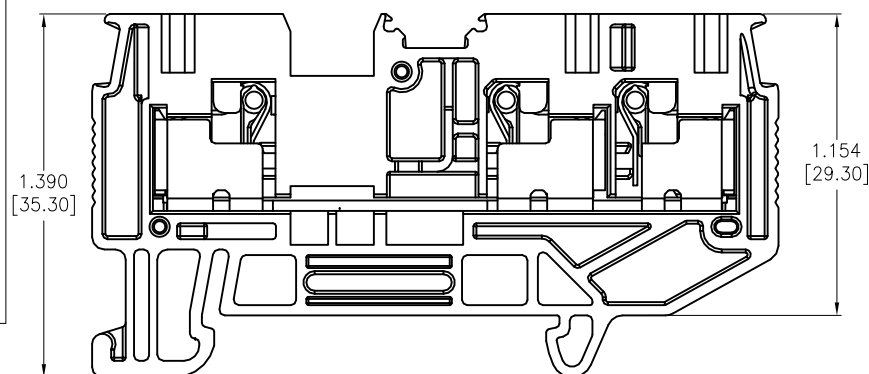
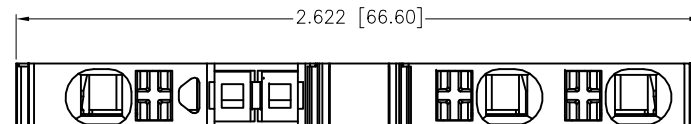


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/7/22	
A		UPDATE SPEC.	9/8/23	LH/RC

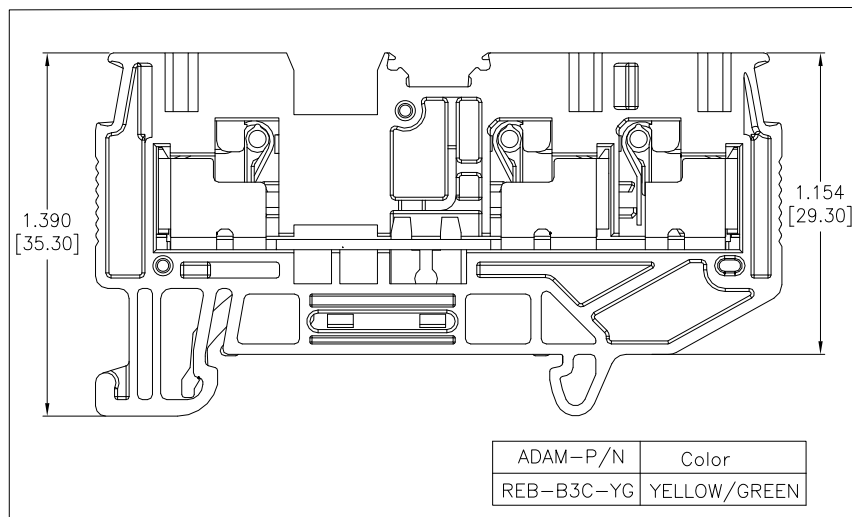

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator Color: See Chart

Contacts: Copper Alloy, Tin Plated

Electrical:

Voltage rating: 600 VAC

Current rating: 30 Amp

Dielectric withstanding voltage: 2200 VAC for 1 minute

Mechanical:

Recommended Wire Size:

Solid: 24-10AWG (0.2-5.3mm²)

Stranded: 24-12AWG (0.2-3.3mm²)

Stripping Length: .394"~.472" (10-12mm)

Temperature Rating:


Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



RECOMMENDED RAIL SIZE
35.0mm X 7.5mm

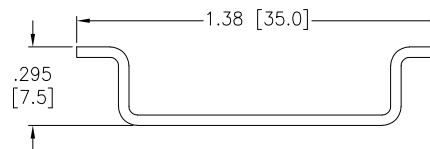

Color
OR=Orange
BU=Blue
GY=Gray
YG=Yellow/Green

REB-B 3 C -XX

Solid/Stranded:
Solid: 24-10 Awg (0.2-5.3mm ²)
Stranded: 24-12 Awg (0.2-3.3mm ²)

ADAM-P/N	Color
REB-B3C-OR	ORANGE
REB-B3C-BU	BLUE
REB-B3C-GY	GRAY
REB-B3C-YG	YELLOW/GREEN

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	ØX ±.10
.XX ±.020	ØXX ±.015
.XXX ±.015	ØXXX ±.010

DRAWN	JJ	10/7/22
CHECKED	RC	10/7/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE DIN RAIL TERMINAL BLOCKS, GUV 3 HOLE, 4.0 FLEXIBLE		
SIZE X	PART NO. REB-B3C-XX	REV. A
REF: S00067C	SCALE: NTS	SHEET 1 OF 1