



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/1/22	
A		UPDATE SPEC.	11/30/22	WX/RC


Ⓐ Lock Nut




Ⓑ Washer

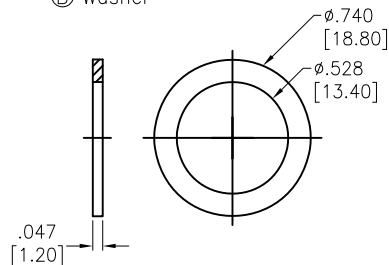




Ⓒ Body

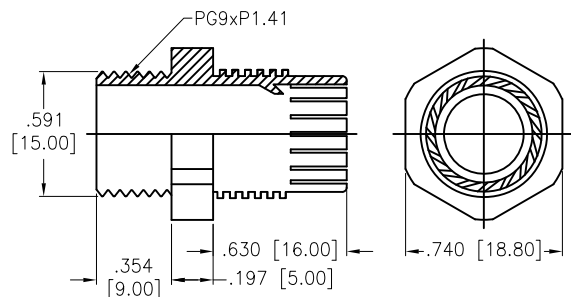

Ⓓ Seal



Ⓔ Sealing Nut

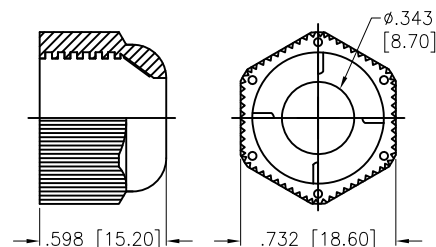

RECOMMENDED
 PANEL CUT-OUT
 (.110 [2.8] MAX PANEL THICKNESS)

SPECIFICATIONS:

Material:

Lock Nut: PA66, rated UL 94V-2

Body: PA66, rated UL 94V-2

Sealing Nut: PA66, rated UL 94V-2

Washer: Nitrile Butylene

Seal: Nitrile Butylene

Mechanical:

Cable range O.D.: $\phi .177 \sim \phi .335 [4.50 \sim 8.50\text{mm}]$

Nut Torque: 1.2Nm Max.

Environmental:

Waterproof: IP68

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED				909 Rahway Avenue, Union, NJ 07083															
<table border="0"> <tr> <td>INCHES</td> <td></td> <td>HOLES</td> </tr> <tr> <td>.X</td> <td>$\pm .10$</td> <td>ϕX</td> <td>$\pm .10$</td> </tr> <tr> <td>.XX</td> <td>$\pm .020$</td> <td>ϕXX</td> <td>$\pm .015$</td> </tr> <tr> <td>.XXX</td> <td>$\pm .015$</td> <td>ϕXXX</td> <td>$\pm .010$</td> </tr> </table>				INCHES		HOLES	.X	$\pm .10$	ϕX	$\pm .10$.XX	$\pm .020$	ϕXX	$\pm .015$.XXX	$\pm .015$	ϕXXX	$\pm .010$	Phone: 908-687-5000
INCHES		HOLES																	
.X	$\pm .10$	ϕX	$\pm .10$																
.XX	$\pm .020$	ϕXX	$\pm .015$																
.XXX	$\pm .015$	ϕXXX	$\pm .010$																
			Fax: 908-687-5710																
DRAWN	LH	11/1/22	TITLE																
CHECKED	RC	11/1/22	WATERPROOF CONNECTOR, PG9, 1 HOLE, CABLE GLAND, WATERPROOF: IP68																
APPROVED			SIZE	PART NO.	REV.														
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH			X	CG-P-9	A														
REF: S00211C		SCALE: NTS	SHEET 1 OF 1																