
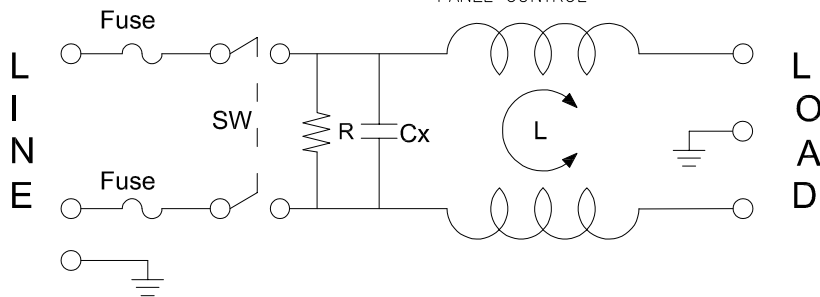


APPROVED: _____

DATE: _____ TITLE: _____

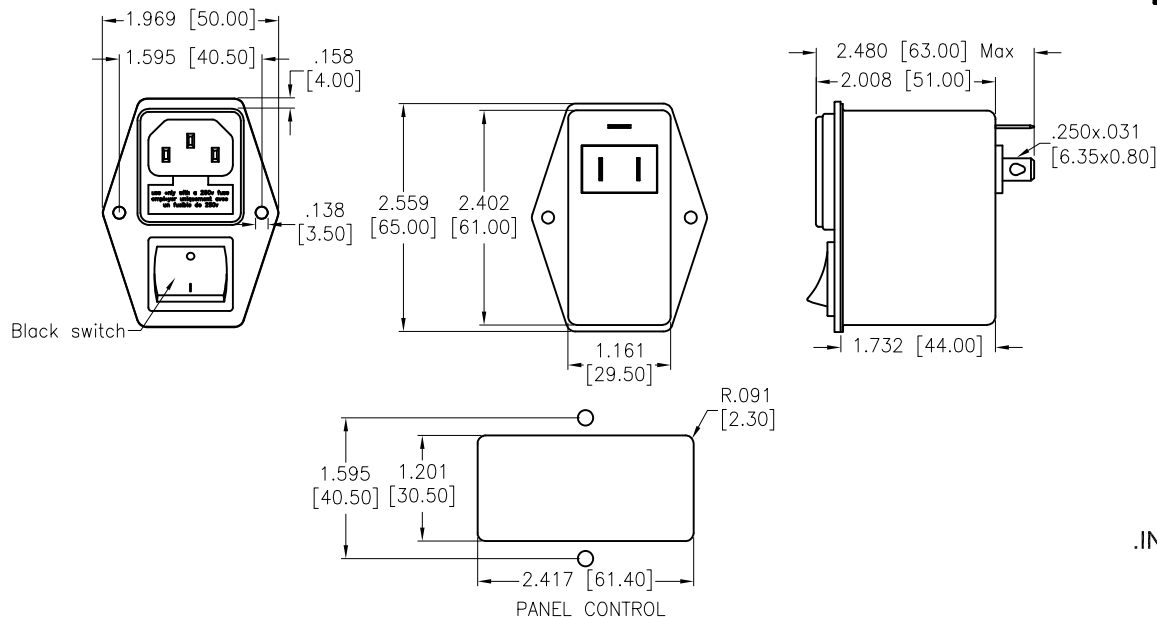

SPECIFICATIONS:

Electrical:

Voltage rating: 115/250 VAC

Current rating: 115/250 VAC: 10A RMS max

Operating frequency: 50/60Hz

Leakage Current: Each Line To Ground

@115VAC/60HZ 2.0uA max

@250VAC/50HZ 5.0uA max

Hipot Rating(For 1 Minute)

A. Line to Ground: 2,250 VDC

B. Line to Line: 500 VDC

IR: 100 Mohm @500 VDC Any Input or Output to Ground

Temperature Rating:

-25°C to +100°C

Environmental:


Lead free, RoHS compliant



, Medical Grade




Rev	AWO #	Description	Date	Appr
-		RELEASED	11/7/22	
A		ADDED SPEC.	7/26/23	LH/RC
B		UPDATE DRAWING	11/21/23	JJ/RC

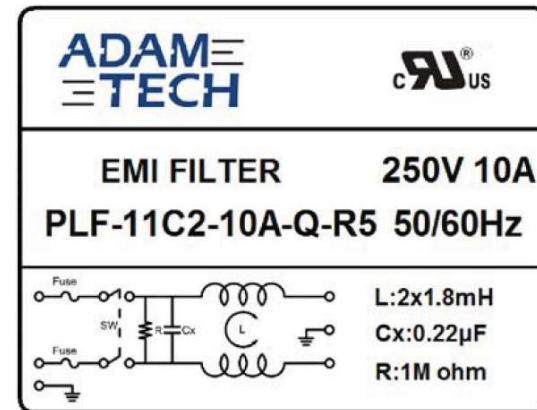

.INSERTION LOSS(IN 50 ohm system according IEC/CISPR)

_____ (common mode)
_____ (differential mode)

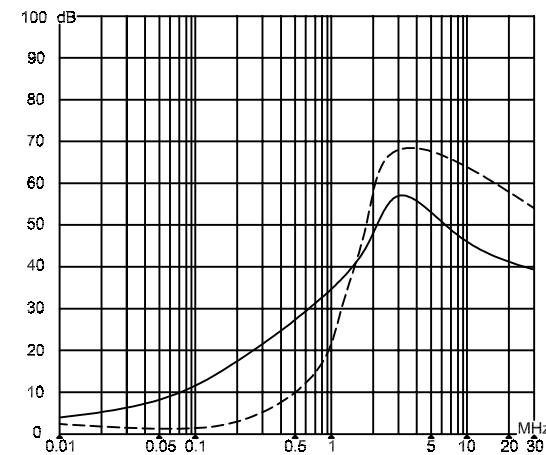

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES
.X	± .10	ØX ±.10
.XX	± .020	ØXX ±.015
.XXX	± .015	ØXXX ±.010

DRAWN	JJ	11/7/22
CHECKED	RC	11/7/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE	FILTERED POWR ENTRY MODULE, MEDICAL GRADE 115/250VAC 10A, DUAL FUSE, SWITCH, FLANGE MOUNT		
-------	--	--	--

SIZE X	PART NO. PLF-11C2-10A-Q-R5	REV. B
REF: S00205C	SCALE: NTS	SHEET 1 OF 1