

## FEATURES:

- 14 pin SMD package
- No-load input current as low as 5mA
- Continuous short-circuit protection
- High Efficiency up to 87%
- Unregulated Output Types
- 1.5KVDC ~ 3KVDC Isolation
- Industry Standard Pinout
- Designed to IEC62368, UL62368, EN62368
- UL Recognized
- RoHS Compliant

Specifications typical at TA=25°C nominal input voltage and rated output current unless otherwise specified

| Part Number  | Input Voltage Range | Output Voltage | Output Current | Efficiency | Capacitive Load(μF) | Package Style |
|--------------|---------------------|----------------|----------------|------------|---------------------|---------------|
|              | Vdc                 | Vdc            | mA             | %TYP       | Max.                |               |
| ES3R-05S05P3 | 4.5~5.5             | 5              | 200            | 82         | 2400                | R             |
| ES3-05S05P3  | 4.5~5.5             | 5              | 200            | 82         | 2400                | blank'        |
| ES3R-24S09P3 | 19.2~28.8           | 9              | 112            | 85         | 1000                | R             |

### Note:

1: No suffix is standard isolation (1.5KVDC) e.g., ES3-12S05P

\*add suffix "3" for 3KVDC isolation, e.g., ES3-12S05P3, ES3-15S12P3,

Package style: no suffix = package 1, T = package 2, R = package 3

e.g., ES3T-15S05P, ES3R-24S12P3

When the I / O is equal to 24V, package 1 and 2 are not available

2: No "P" suffix = no short circuit protection, e.g., ES3-05S05

\*add suffix "P" for short circuit protection, e.g., ES3T-05S05P, ES3R-05S12P3

3: Character after "-" is Input Voltage: 12=12Vdc, 15=15Vdc, 24=24Vdc


e.g., ES3R-12S05P, ES3-15S12P3, ES3T-24S15P.

# ADAM TECH


## DC-DC Converter ES3 Series

1 Watt

1.5KV ~ 3KV Isolated  
Single Output  
SMD14

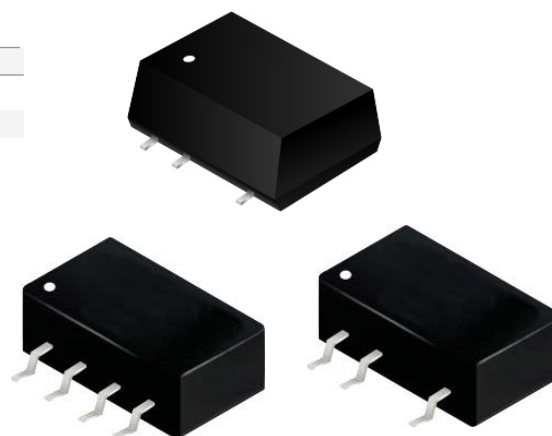

## Temperature Derating Graph

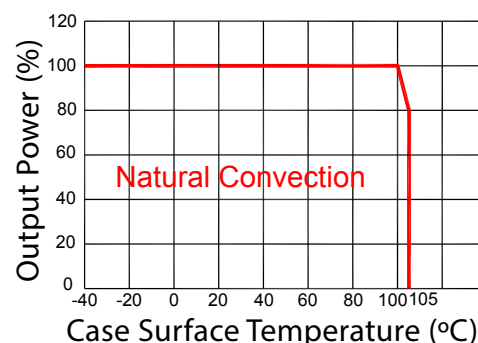

## Input Specifications

| Parameters    | Conditions                 | Min | Typ | Max | Units |
|---------------|----------------------------|-----|-----|-----|-------|
| Voltage Range | Vo,Io Nom@Vin:5V           |     | ±10 |     | %     |
|               | Vo,Io Nom@ Vin:12V,15V,24V |     | ±20 |     | %     |
| Filter        | Capacitor                  |     |     |     |       |

## Output Specifications

| Parameters               | Conditions                               | Min | Typ        | Max | Units |
|--------------------------|------------------------------------------|-----|------------|-----|-------|
| Voltage Tolerance        | 100% full load                           |     |            | ±5  | %     |
| Short Circuit Protection | without suffix "P"                       |     |            | 1   | Sec   |
|                          | With Suffix "P"                          |     | Continuous |     |       |
| Line Regulation          | For 1.0% OF Vin                          |     | 1.2        |     | %     |
| Load Regulation          | 3.3V (10% To 100% F.L)                   |     | 15         | 20  | %     |
|                          | 5V (10% To 100% F.L)                     |     | 10         | 15  | %     |
|                          | 9V (10% To 100% F.L)                     |     | 8          | 10  | %     |
|                          | 12V (10% To 100% F.L)                    |     | 7          | 10  | %     |
|                          | 15V (10% To 100% F.L)                    |     | 6          | 10  | %     |
| Ripple & Noise           | 24V (10% To 100% F.L)                    |     | 5          | 10  | %     |
|                          | BW=DC To 20MHz<br>@Vo:3.3V,5V,9V,12V,15V |     | 30         | 75  | mVp-p |
|                          | BW=DC To 20MHz<br>@ Vo:24V               |     | 50         | 100 | mVp-p |

## General Specifications


| Parameters            | Conditions                             | Min           | Typ | Max  | Units |
|-----------------------|----------------------------------------|---------------|-----|------|-------|
| Isolation Resistance  | 500Vdc                                 | 1000          |     |      | MΩ    |
| Isolation Capacitance | Input-output,<br>100KHz/0.1V           |               | 20  |      | pF    |
| Switching Frequency   | Full load, nominal input<br>@5V Vin    |               | 370 |      | KHz   |
|                       | Full load, nominal input<br>@other Vin |               | 250 |      | KHz   |
| Operating Temperature |                                        | -40           |     | +105 | °C    |
| Storage Temperature   |                                        | -55           |     | +125 | °C    |
| Humidity              | Non Condensing                         |               |     | 95   | %     |
| Cooling               | Free air Convection                    |               |     |      |       |
| Case Material         | DAP                                    |               |     |      |       |
| MTBF                  | MIL-HDBK-217F@25°C                     | 3,500,000     |     |      | Hours |
| Weight                | Package 1/2/3                          | 1.2/1.2/1.28  |     |      | g     |
| Dimensions            | Package 1                              | 12.7x7.6x6.25 |     |      | mm    |
|                       | Package 2                              | 12.7x7.6x6.25 |     |      | mm    |
|                       | Package 3                              | 12.8x10.8x6.9 |     |      | mm    |

## Part Number

ES3   X   -   XX   X   XX   X   X  
A   B   C   D   E   F   G

A: Series  
B: Package  
C: Input Voltage  
D: Single (S) / Dual Output (D)  
E: Output Voltage  
F: Protection (P)  
G: Isolation Voltage


## Tolerance Envelope Graph

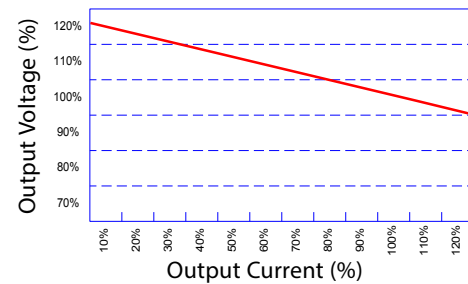

## Electromagnetic Compatibility (EMC)

|     |     |                                                                 |
|-----|-----|-----------------------------------------------------------------|
| EMI | CE  | CISPR32/EN55032 CLASS B<br>(see Fig. 1 for recommended circuit) |
|     | RE  | CISPR32/EN55032 CLASS B<br>(see Fig. 1 for recommended circuit) |
| EMS | ESD | IEC/EN61000-4-2 Air ±8kV ,<br>Contact ±4kV perf. Criteria B     |

## Recommended Test Circuit



| Vin   | Cin       | Single Vout | Cout      |
|-------|-----------|-------------|-----------|
| 5Vdc  | 4.7μF/25V | 3.3Vdc      | 10μF/16V  |
| 12Vdc | 2.2μF/25V | 5Vdc        | 10μF/16V  |
| 15Vdc | 2.2μF/25V | 9Vdc        | 2.2μF/16V |
| 24Vdc | 1μF/50V   | 12Vdc       | 2.2μF/25V |
| --    | --        | 15Vdc       | 1μF/25V   |
| --    | --        | 24Vdc       | 1μF/50V   |

## EMC (CLASS B) Compliance Circuit


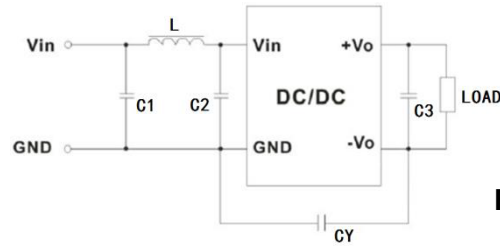


Fig.1

| EMC Recommended Circuit Value Table |    |                          |
|-------------------------------------|----|--------------------------|
| EMI                                 | C1 | 4.7 $\mu$ F /50V         |
|                                     | C2 | 4.7 $\mu$ F /50V         |
|                                     | CY | 1nF/4kV                  |
|                                     | C3 | Recommended Test Circuit |
|                                     | L  | 6.8 $\mu$ H              |

## Markings and Dimensions

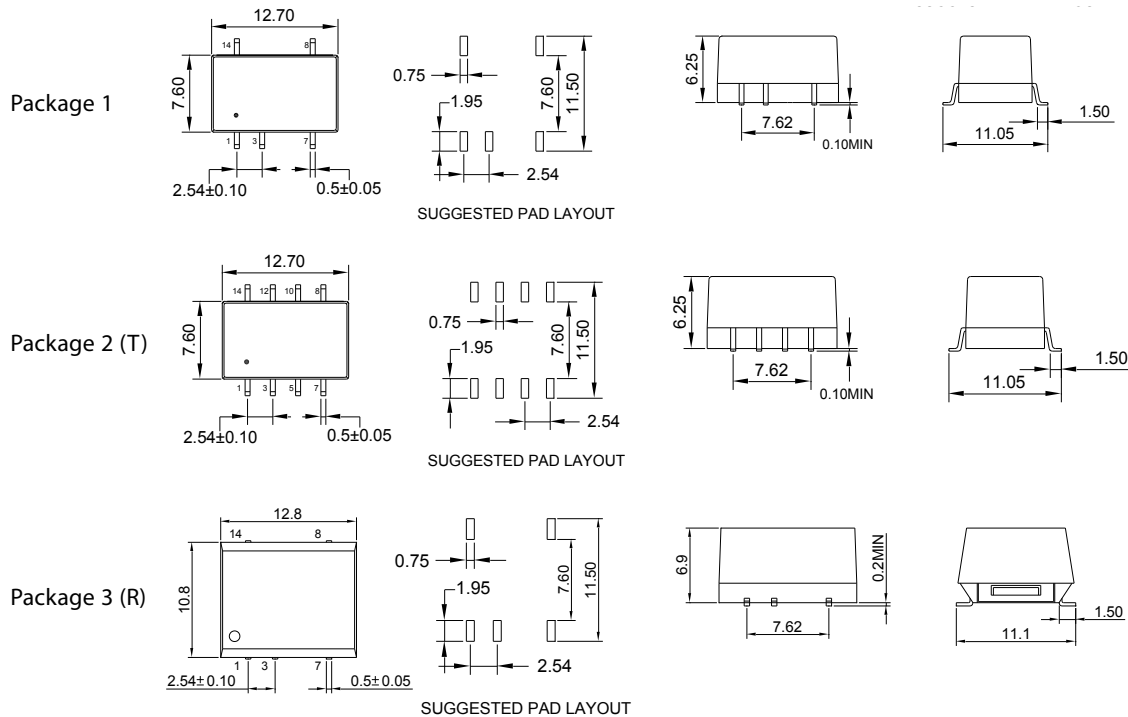

UNIT: mm unless otherwise specified, all tolerances are  $\pm 0.25$

## PIN Connection

| PIN         | 1    | 3    | 7     | 8     | 14 | Other  |
|-------------|------|------|-------|-------|----|--------|
| Package 1/3 | -Vin | +Vin | -Vout | +Vout | NC | NO PIN |
| Package 2   | -Vin | +Vin | -Vout | +Vout | NC | NC     |