

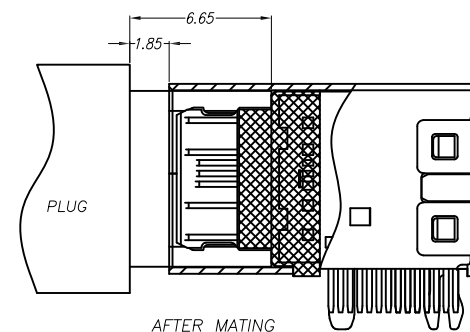


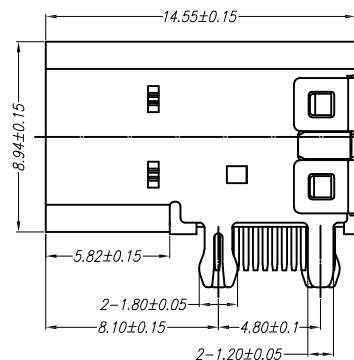
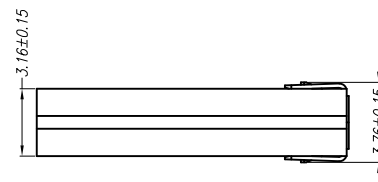


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/28/23	
A		UPDATE TITTLE	7/4/24	LH/RC

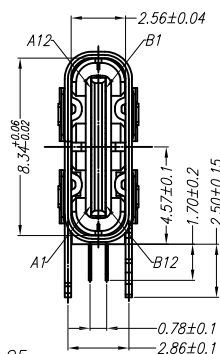

Lead free, RoHS compliant



USB TYPE-C PIN ASSIGNMENTS			
PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

MM		ANGLE	
X	$\pm .35$	X	$\pm 2^\circ$
.X	$\pm .25$	.X	$\pm 1.5^\circ$
.XX	$\pm .15$		

DRAWN	WX	6/28/23
CHECKED	LW	6/28/23
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE				UNIVERSAL SERIAL BUS, TYPE C, FEMALE UPRIGHT THRU-HOLE, RIGHT ANGLE, BLACK TRANSMISSION EFFICIENCY: 480Mbps			
SIZE		PART NO.				REV	
X		USB-C20-S-RU-CS2A-BL-BK				A	
REF:		S00005C		SCALE: NTS		SHEET 1 OF 1	