






DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/30/21	
A		UPDATED DRAWING	9/1/22	JJ/TY
B		UPDATE TITLE	6/27/24	WX/RC

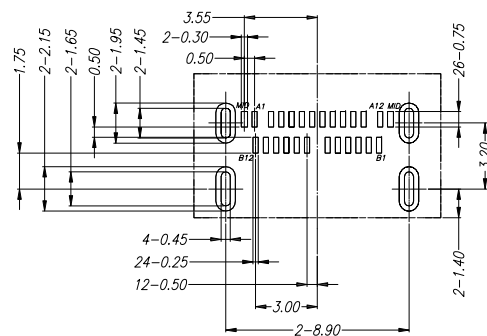

RECOMMENDED PCB LAYOUT

Lead free, RoHS compliant.

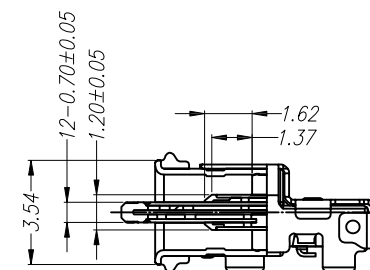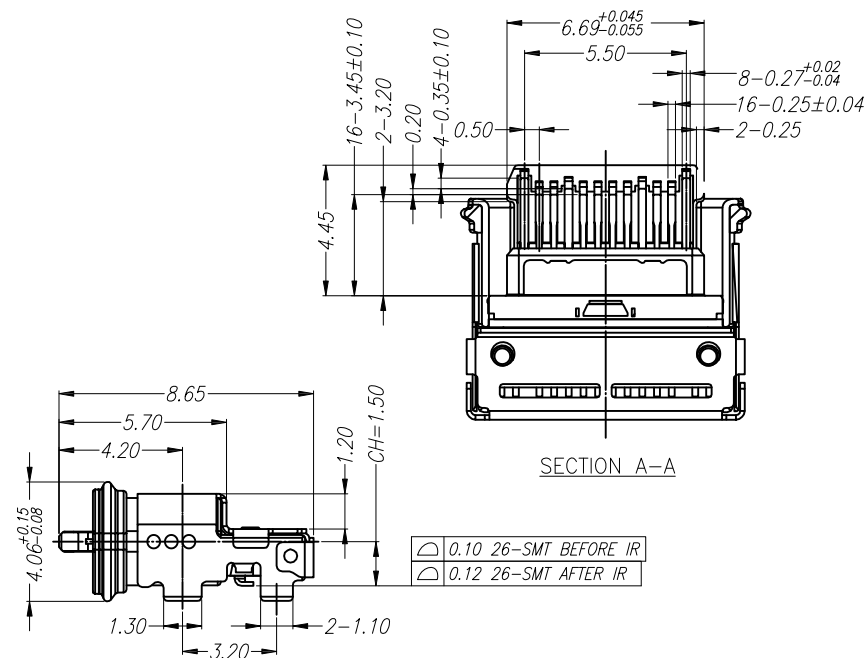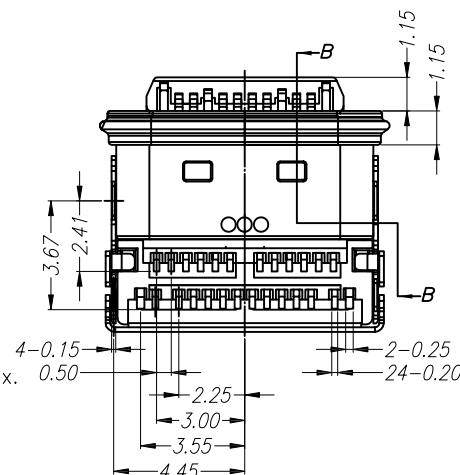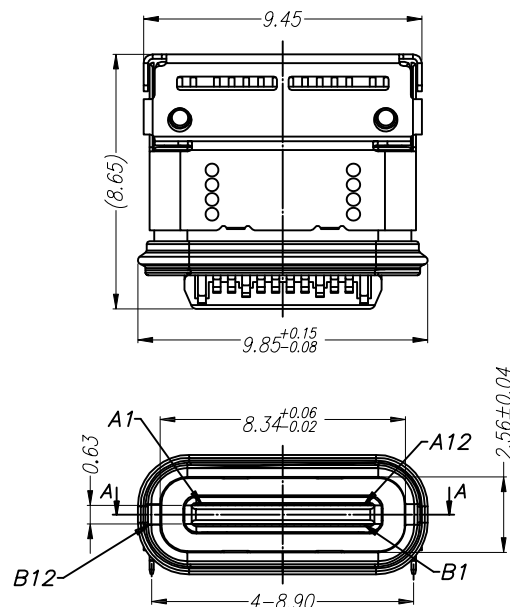

SECTION B-B

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	TX1+	B11	RX1+
A3	TX1-	B10	RX1-
A4	Vbus	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	RX2-	B3	TX2-
A11	RX2+	B2	TX2+
A12	GND	B1	GND

	MM		ANGLE
X.	± 0.50	X.	$\pm 3^\circ$
.X	± 0.35		
.XX	± 0.25		
.XXX	± 0.15		

DRAWN	LH	9/30/21
CHECKED	NL	9/30/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE		UNIVERSAL SERIAL BUS3.1, TYPE C, FEMALE, TRANSMISSION EFFICIENCY: Gen2 10Gbps SMT TYPE, BLACK INSULATOR, WATERPROOF	
SIZE	PART NO.		
X	USB-C32-S-RA-CS15D-SMT-WP-BK-30-T/R		REV B
REF:	S00288T	SCALE: NTS	SHEET 1 OF 1