

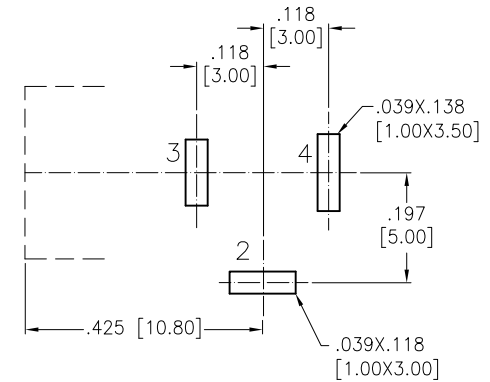
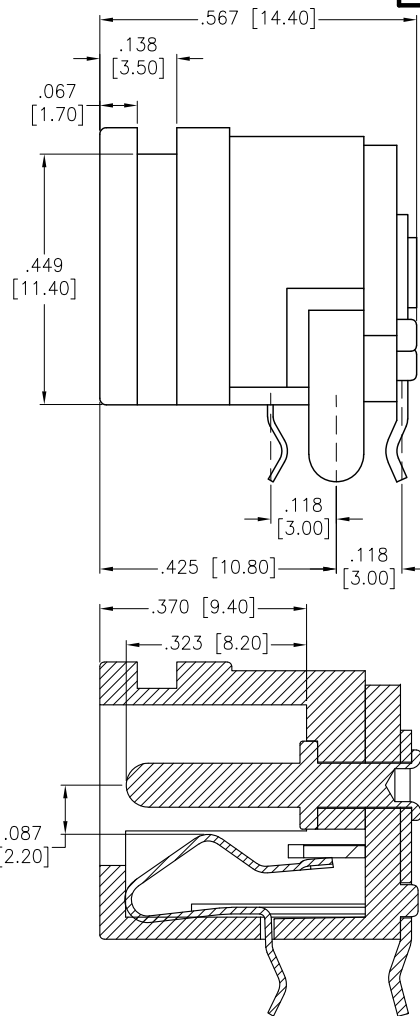


APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

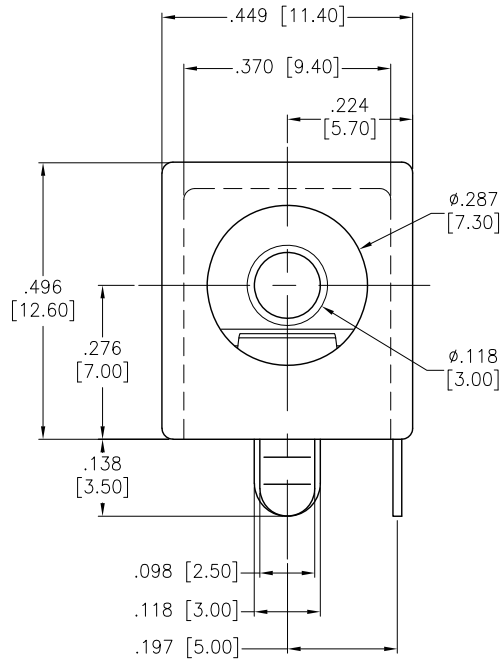

SPECIFICATIONS:

Material:

Hosing: PBT, rated UL94V-0, Color: Black

Cover: PBT, rated UL94V-0, Color: Black

Pin: Brass, Nickel plated

Spring: Bronze, Silver plated

Flat piece: Brass, Silver plated

Curve piece: Brass, Silver plated

Electrical:

Rating: 12VDC, 5A

Contact resistance: 30 mohms max

Insulation Resistance: 100 Mohms min @ 250 VDC

Dielectric Withstanding Voltage: 500 VAC

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED  
INCHES HOLES  
.X  $\pm .10$   $\phi$ .X  $\pm .10$   
.XX  $\pm .020$   $\phi$ .XX  $\pm .015$   
.XXX  $\pm .015$   $\phi$ .XXX  $\pm .010$

APPROVALS

DATE

DRAWN

HR

11/11/14

CHECKED

TW

11/11/14

APPROVED

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

DC POWER JACK, 3.00 mm CENTER PIN

SIZE

X

PART NO.

ADC-033A-10

REV.

C

REF: S00102C

SCALE: NTS

SHEET 1 OF 1