
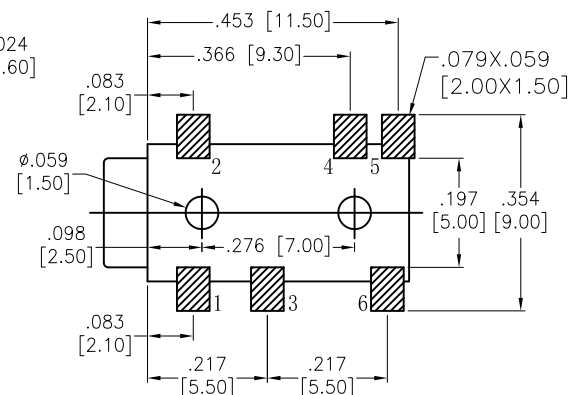
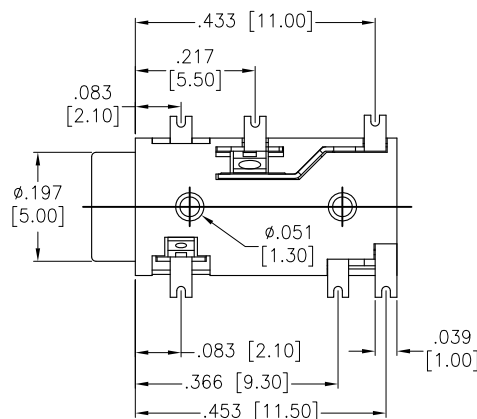
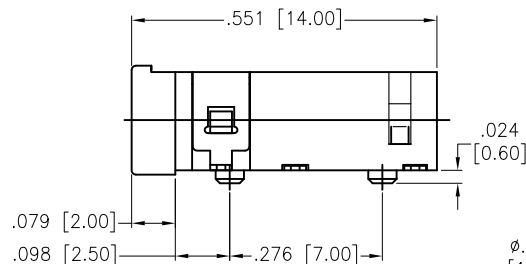


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/2/15	

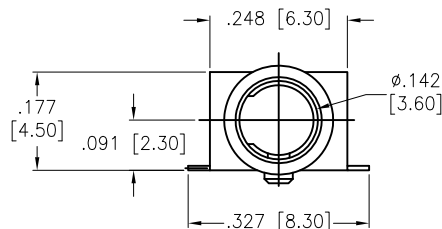

RECOMMENDED P.C.B. LAYOUT

ADAM P/N	ASJ-154S-I-T/R	ASJ-154S-A-T/R	ASJ-154S-D-T/R	ASJ-154S-M-T/R	ASJ-154S-J-T/R	ASJ-154S-K-T/R
SCHEMATIC						

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Plating:
 Silver over Copper underplate overall
 Electrical:
 Voltage rating: 30 VDC
 Current rating: 0.5 A
 Contact resistance: 0.03 Ω max
 Insulation resistance: 100 M Ω min @ 250 VDC
 Dielectric withstanding voltage: 500 VAC
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X $\pm$.10 $\varnothing$.X $\pm$.10 .XX $\pm$.020 $\varnothing$.XX $\pm$.015 .XXX $\pm$.015 $\varnothing$.XXX $\pm$.010	ADAM TECH INTERCONNECTS 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710
APPROVALS DRAWN HR 9/2/15 CHECKED YC 9/2/15 APPROVED	DATE 9/2/15
TITLE STEREO PHONE JACK, 3.5MM	SIZE X PART NO. ASJ-154S-X-T/R REV. -
REF: S00102C SCALE: NTS SHEET 1 OF 1	