
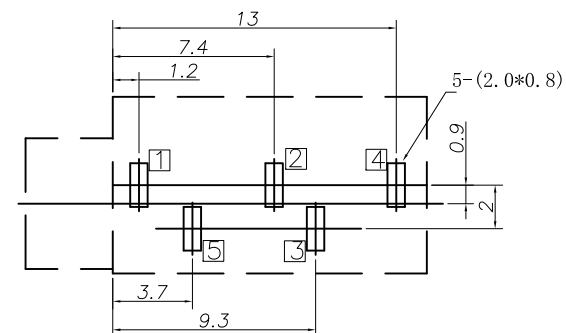
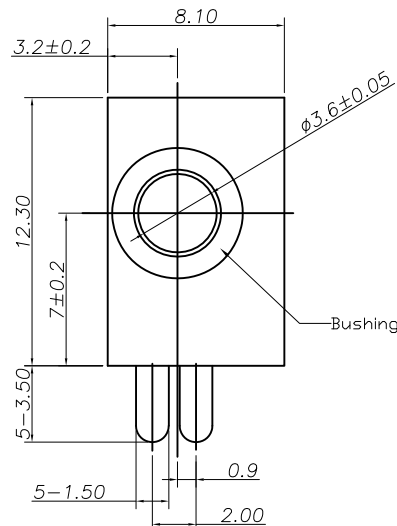



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/2/03	
A		REDRAWN	8/30/10	
B		UPDATE DRAWING.	5/5/21	WX/RT

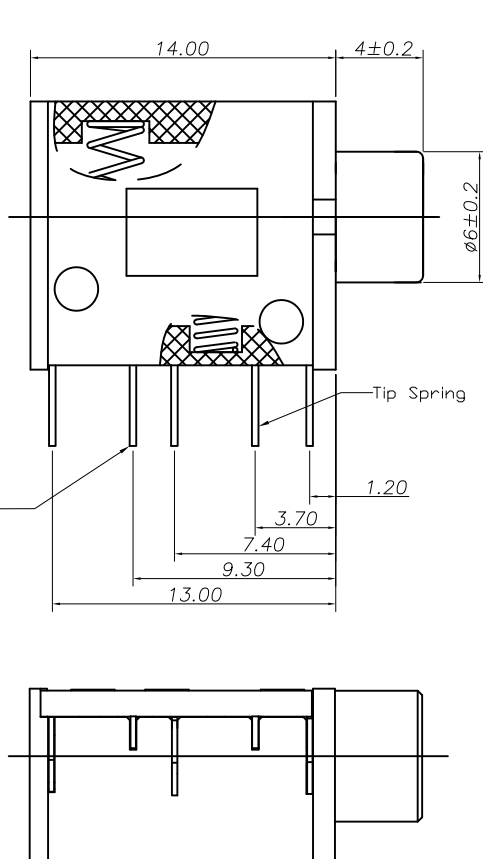

RECOMMENDED PCB LAYOUT

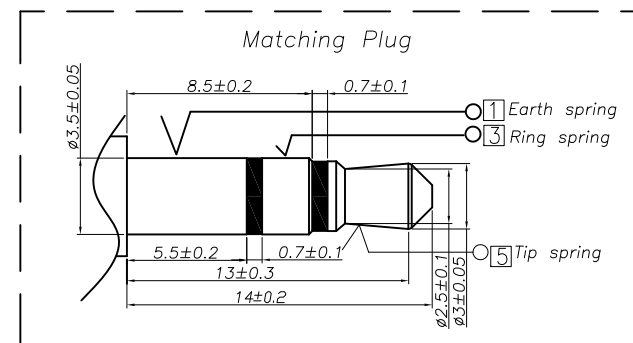

SPECIFICATIONS:

Material:
 Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy, Tin plated.
 Bushing: Copper Alloy, Nickel plated
 Ring spring: Phosphor Bronze, Silver plated
 Tip spring: Phosphor Bronze, Tin plated
 Electrical:
 Operating voltage: 30 VDC max.
 Current rating: 0.5 Amp max.
 Contact resistance: 30 mohms max.
 Insulation resistance: 100 Mohms min @ 500VDC
 Dielectric withstanding voltage: 500 VAC
 Temperature Rating:
 Operating temperature: -20°C to +70°C
 Environmental:
 Lead free, RoHS compliant.



CONTACT FORM	ASJ-5-5	ASJ-5-4B	ASJ-5-3A	ASJ-5-3	ASJ-5-2	ASJ-5-4
SCHEMATIC						

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED		
MM	ANGLE	
.X ± .50	X' ± 5'	
.XX ± .30	X' ± 3'	
.XXX + .15	.XX' ± 2'	

DRAWN	SLS	8/2/03
CHECKED	AY	8/30/10
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE STEREO JACK, RIGHT ANGLE, PCB MOUNT		
SIZE X	PART NO. ASJ-5-XX	REV. B
REF: S00002C	SCALE: NTS	SHEET 1 OF 1