

6

5

4





3

2

1

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/17/12	
A		REDRAWN	9/16/13	AV/GC
B		REVISED DIM. & SPEC.	3/25/14	AV/MY

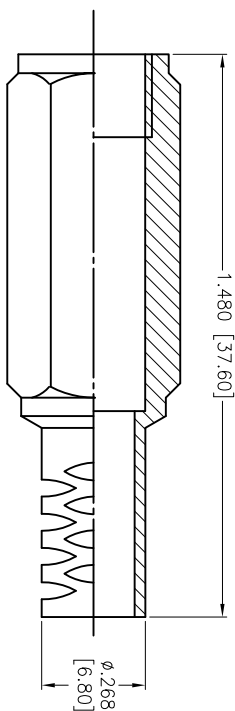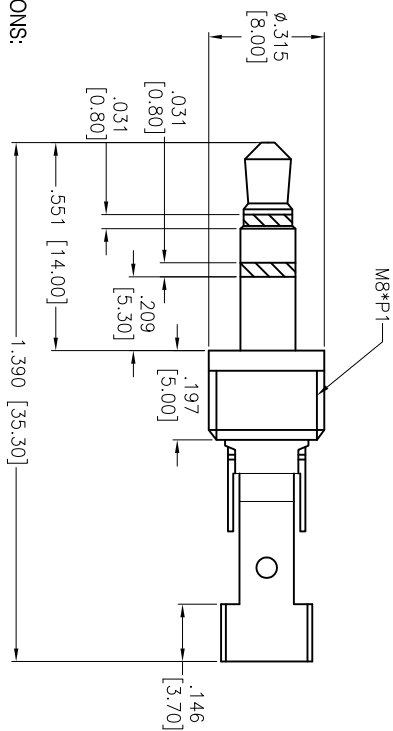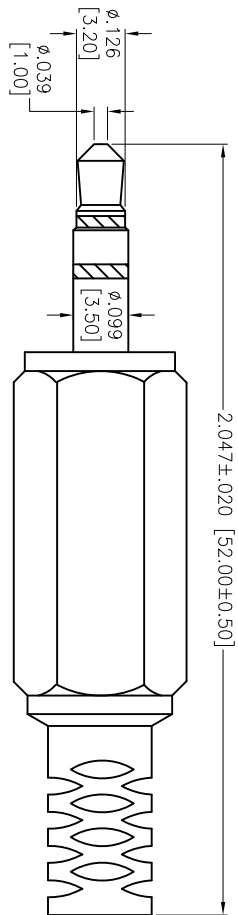

**SPECIFICATIONS:**

- Material:**  
 Contacts Head: Brass, Nickel plated  
 Insulator (Tip & Ring): POM, Color: Black  
 Sleeve: Brass, Nickel plated  
 Bushing: Brass, Nickel plated  
 Terminal Insulator: POM, Color: Black  
 Earth Terminal: Brass, Nickel plated  
 Ring Terminal: Brass, Nickel plated  
 Tip Terminal: Brass, Nickel plated  
 Pin: Brass, Nickel plated  
 Plastic Cover: PE, Color: Black

**Electrical:**

- Contact resistance: 30 mohms max  
 Insulation resistance: 100 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Environmental:  
 Lead free, RoHS compliant.

**ADAM TECH**

909 Ratway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

AUDIO STEREO PLUG, 3.5mm

**TITLE**

AUDIO STEREO PLUG, 3.5mm

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES  
 .X ±.10 Ø.X ±.10  
 .XX ±.020 Ø.XX ±.015  
 .XXX ±.015 Ø.XXX ±.010

**APPROVALS**

**DATE**

APPROVALS	DATE
DRAWN AY	10/17/12
CHECKED CC	10/17/12
APPROVED	

**TITLE**

AUDIO STEREO PLUG, 3.5mm

AUDIO STEREO PLUG, 3.5mm

SIZE	PART NO.	SCALE	SHEET	REV.
X	ASP-3.5-S-SR	NTS	1 OF 1	B

REF: S00062T

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1

