

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/21/15	

6

5

4



3

2


1

APPROVED: _____

DATE: _____ TITLE: _____

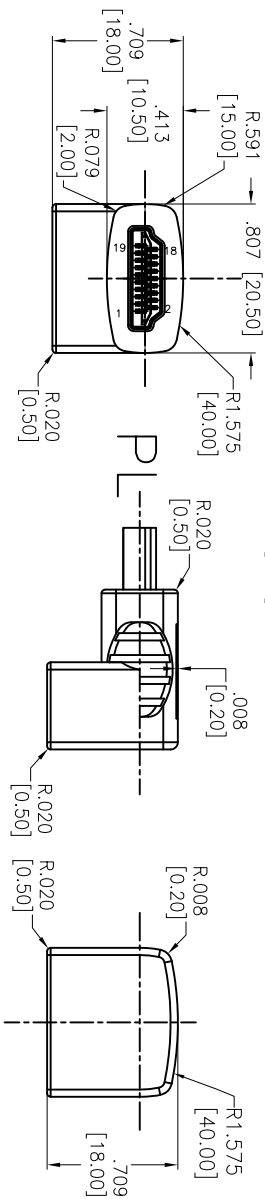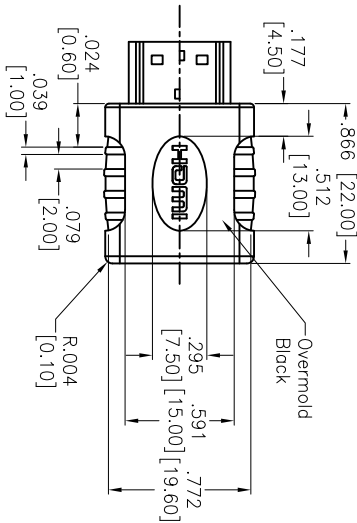

PIN ASSIGNMENT									
CN1	CN2	CN1	CN2	CN1	CN2	CN1	CN2	CN1	CN2
01	01	11	11	02	02	12	12	03	03
02	02	12	12	03	03	13	13	04	04
03	03	13	13	04	04	14	14	05	05
04	04	14	14	05	05	15	15	06	06
05	05	15	15	06	06	16	16	07	07
06	06	16	16	07	07	17	17	08	08
07	07	17	17	08	08	18	18	09	09
08	08	18	18	09	09	19	19	10	10
09	09	19	19	10	10	SHELL	SHELL	SHELL	SHELL

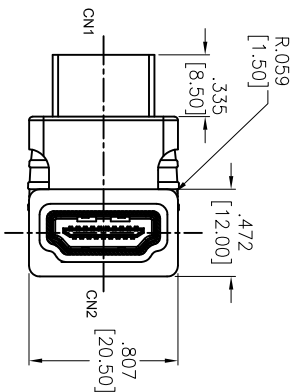

SPECIFICATIONS:

Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Shell: Brass, Nickel plated
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 1.5 Amps max.
Contact resistance: 30 milliohms max.
Insulation resistance: 100 Megohms min.
Dielectric withstanding voltage: 300 VAC for 1 minute
Temperature Rating:
Operating temperature: -20°C to +60°C
Environmental:
Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

GENDER CHANGER, HDMI 19P MALE TO

HDMI 19P FEMALE, RIGHT ANGLE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
.X	± .10	ØX	± .10	.XX	± .020	ØXX	± .015	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN	AY	4/21/15									
CHECKED	KW	4/21/15									
APPROVED											

A

B

C

D

6

5

4

3

2

1