
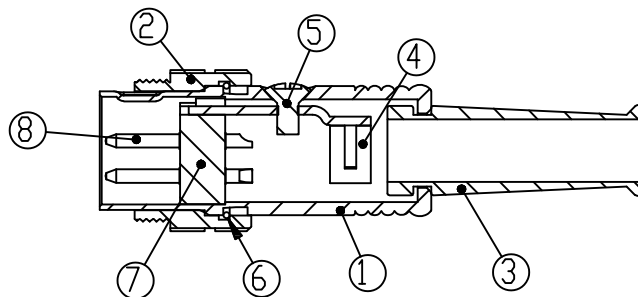


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/18/20	
A		UPDATE SPEC.	12/15/20	LH
B		UPDATE SPEC.	12/23/20	LH/KC

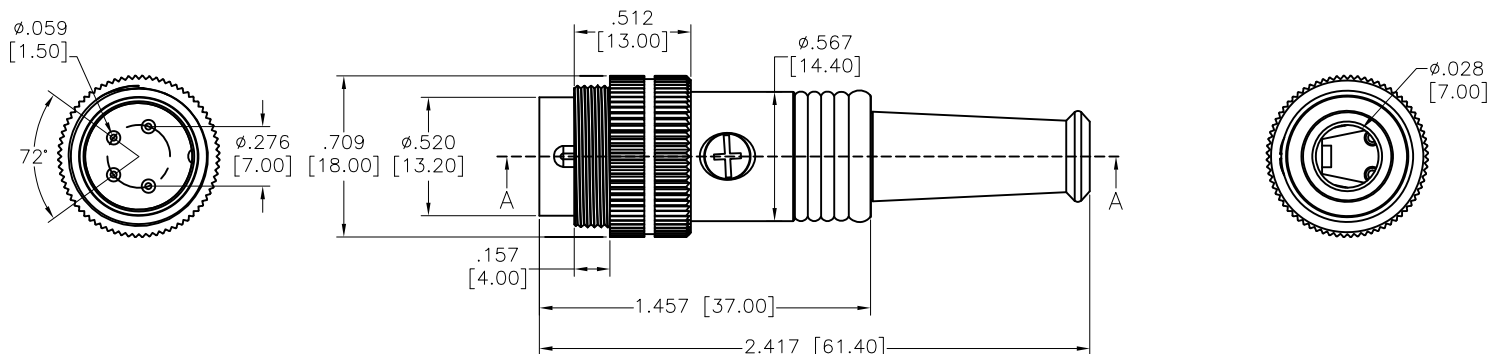

SECTION A-A

SPECIFICATIONS:

Material:

8	Contact Terminals	Brass	Silver Ptd.
7	4P Housing	PA66	
6	Spring Ring	Steel	Nickel Ptd.
5	Setscrew	Steel	Nickel Ptd.
4	"T" Holder	Steel	Nickel Ptd.
3	Strain Boot	PVC	
2	Screw Cap	Brass	Nickel Ptd.
1	Shell Cover	Brass	Nickel Ptd.
NO	Description	Material	Treat

Electrical:

Voltage rating: 100 VAC max.

Current rating: 4 Amp max.

Contact resistance: Pin: 30 mohms max

Shell: 50 mohms max

Insulation resistance: 100 Mohms min. @ 500VDC

Dielectric withstanding voltage: 250 VAC for 1 minute

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	LH	9/18/20
CHECKED	KC	9/18/20
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE			
MALE DIN PLUG, LOCKING TYPE			
SIZE X	PART NO. DP-004-LT-A	REV. B	
REF: S00072T	SCALE: NTS	SHEET 1 OF 1	