




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/29/07	
A	10521	REDRAWN	9/10/10	
B		REDRAWN	1/22/14	AY/KW
C		UPDATE SPEC.	7/28/20	AY/LL1

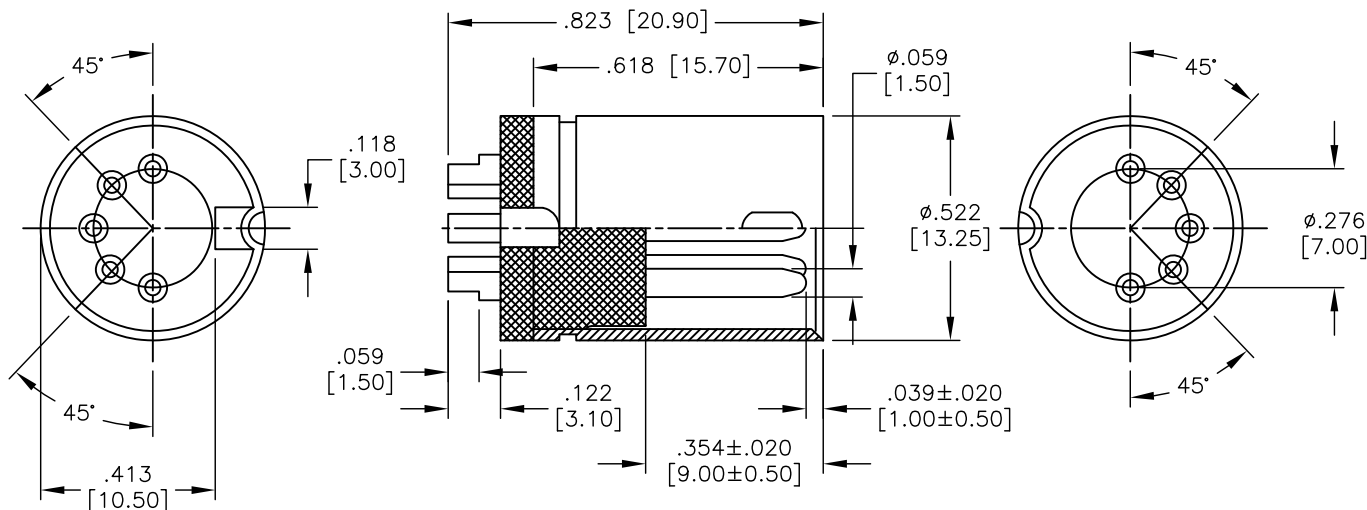

SPECIFICATIONS:

Material:

Housing: ABS, Black

Contact: Brass, Nickel plated

Shell: Brass, Nickel plated

Electrical:

Rating: 100V AC max. or 12V DC 2A max.

Insulation resistance: 50 Mohms min. @ 250V DC

Withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -20°C to +105°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS		DATE
DRAWN	SS	5/29/07
CHECKED		
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE		
DIN PLUG MOLDING TYPE, (3-8 PIN)		
SIZE X	PART NO. DP-XXX-M	REV. C
REF: S00072T	SCALE: NTS	SHEET 1 OF 1