
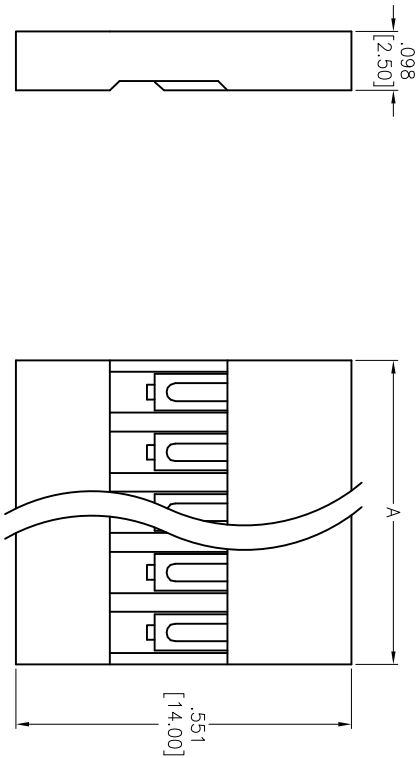


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	
A		REVISED SPEC. & DIM.	04/24/12	



SPECIFICATIONS:

Material:
Insulator: NORYL, UL94V-1
Insulator color: Black
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 800 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant



Positions: 1 thru 50
A = .100 [2.54] x No. of Positions + .008 [0.20]
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		TITLE	
.X ± .10 .XX ± .020 .XXX ± .015	ØX ± .10 ØXX ± .015 ØXXX ± .010	909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		CRIMP CONTACT HOUSING	
DRAWN	SS	4/7/05	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	MTE-XX	A	
REF:	S00016T	SCALE:	NTS
		SHEET	1 OF 1