

6

5

4

3




2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	
A		REDRAWN	07/28/16	TW/SUE

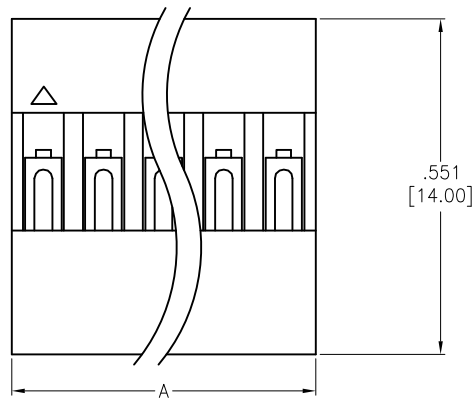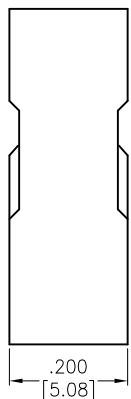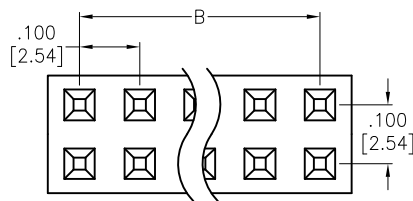

Positions: 4 thru 80

A = .100 [2.54] x No. of Positions

B = .100 [2.54] x No. of Spaces

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, UL94V-1

Insulator color: Black

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amps max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
CRIMP CONTACT HOUSING, .100 [2.54] PITCH

APPROVALS		DATE
DRAWN	SS	4/7/05
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	MTF-XX	-
REF: S00016T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1