
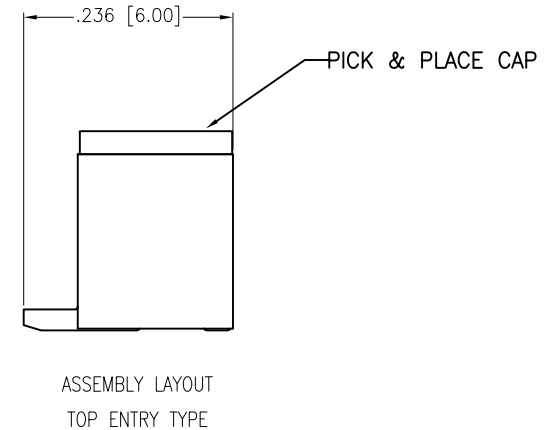
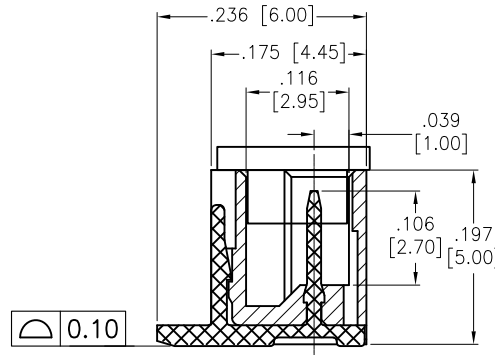
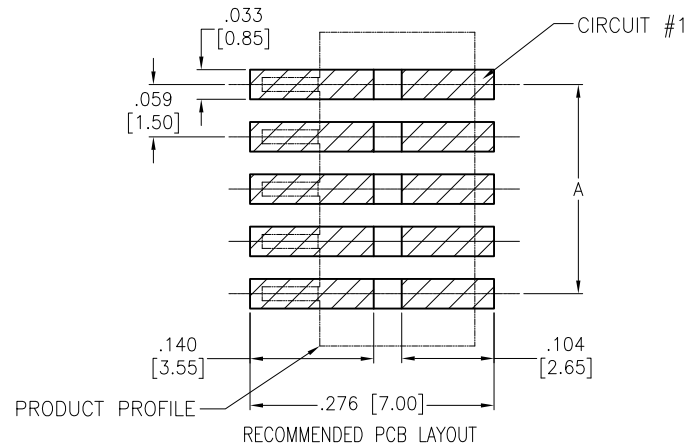


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/30/17	
A		UPDATE PACKING	4/26/18	AY/RC1

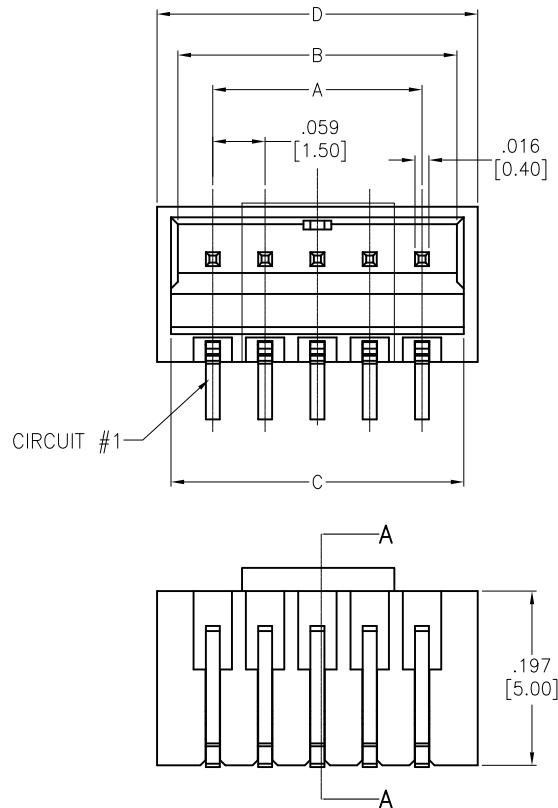

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Natural
 Contacts: Copper Alloy

Plating:
 Matte Tin over Nickel underplate overall

Electrical:
 Operating voltage: 50 V AC/DC
 Current rating: 1.5 A AC/DC
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute

Mechanical:
 Wire Range: 30-24AWG
 Insulator O.D: .031-.043 [0.80-1.10] max
Temperature Rating:
 Operating temperature: -55°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL


Positions: 2 thru 15

A = .197 [1.50] x No. of Spaces
 B = .197 [1.50] x No. of Positions + .020 [0.50]
 C = .197 [1.50] x No. of Positions + .035 [0.90]
 D = .197 [1.50] x No. of Positions + .059 [1.50]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES		TITLE .059 [1.50] VERTICAL HEADER, SURFACE MOUNT WITH PICK & PLACE CAP	
HOLES		SIZE X	REV. A
APPROVALS		PART NO. 15SH-B1-XX-TS-SMT-PP-T/R	
DRAWN	AY	8/30/17	
CHECKED	RC1	8/30/17	
APPROVED			
REF: S00163T		SCALE: NTS	SHEET 1 OF 2



APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				



Unit: mm

LABEL
STICK TO
THE BACK

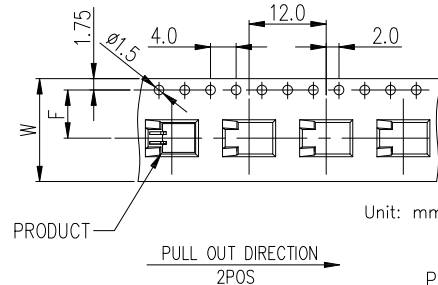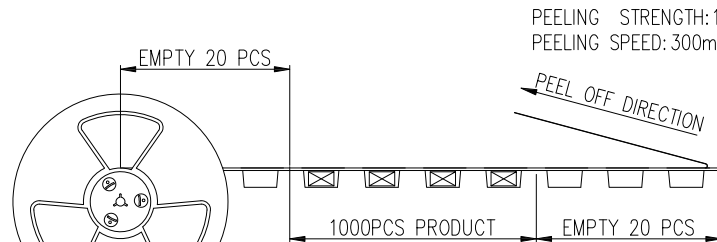


PRODUCT

PULL OUT DIRECTION
2POS

Unit: mm


PEELING STRENGTH: 10~130GF
PEELING SPEED: 300mm/Min

PEEL OFF DIRECTION


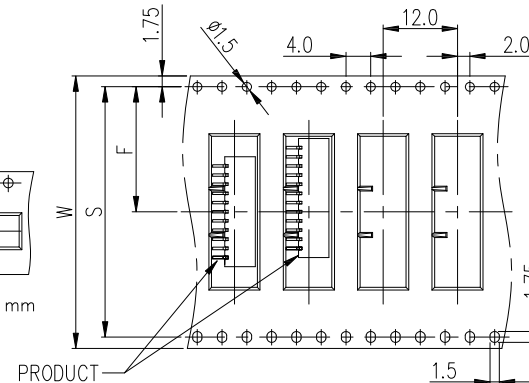


PRODUCT
Between two parties Or
lean against the top

PULL OUT DIRECTION
3POS~15POS



Unit: mm

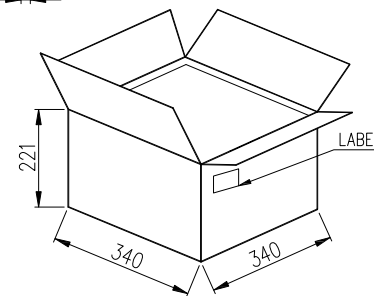

Unit: mm

TABLE 2:

POS	PCS/REEL	PCS/CARTON
2	900	10800
3	900	10800
4	900	10800
5	600	7200
6	600	7200
7	600	7200
8	600	7200
9	600	7200
10	400	4800
11	400	4800
12	400	4800
13	400	4800
14	400	4800
15	400	4800

TABLE 1:

POS.	A	W	S	F
2	16.5	16.0		7.5
3~7	24.5	24.0		11.5
8~13	44.5	44.0	40.4	20.2
14~15	53.5	53.0	49.4	24.7

Unit: mm

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
HOLES
MM
.X ±.25
.XX ±.15
.XXX ±.05

APPROVALS		DATE
DRAWN	AY	8/30/17
CHECKED	RC1	8/30/17
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.059 [1.50] VERTICAL HEADER, SURFACE MOUNT
WITH PICK & PLACE CAP

SIZE	PART NO.	REV.
X	15SH-B1-XX-TS-SMT-PP-T/R	A
REF:	S00163T	SCALE: NTS
SHEET 2 OF 2		