


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/26/13	
A		UPDATE DRAWING	12/26/19	AY/KL

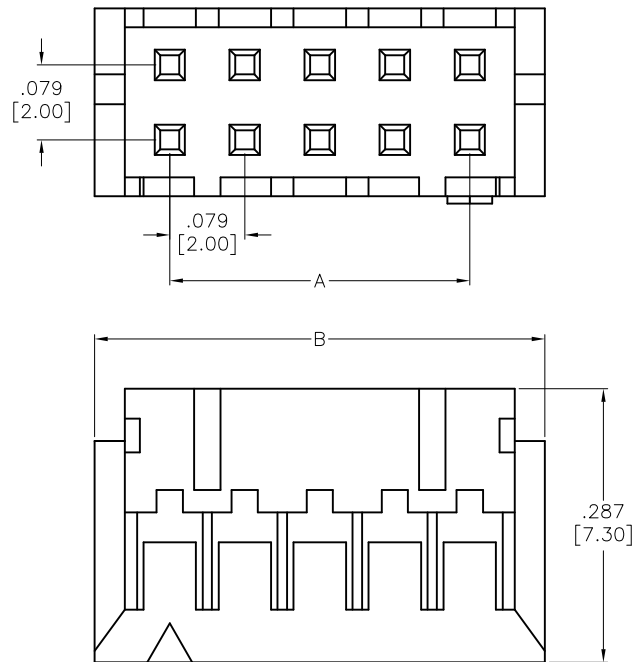

Positions: 4, 6, 8, 10, 12, 14, 16, 18, 20, 22,  
 24, 26, 28, 30, 32, 40

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces + .157 [4.00]

**SPECIFICATIONS:**

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Electrical:

Voltage rating: 130 VAC/DC

Current rating: 1A AC/DC

Contact resistance: 20 Mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		<b>ADAM TECH</b> INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE		TITLE	
DRAWN	AY	4/26/13		.079 [2.00] HOUSING	
CHECKED	EH	4/26/13		SIZE	PART NO.
APPROVED				X	2CHD-C-XX-V0
				REV.	A
				REF: S00015T	SCALE: NTS
				SHEET 1 OF 1	