
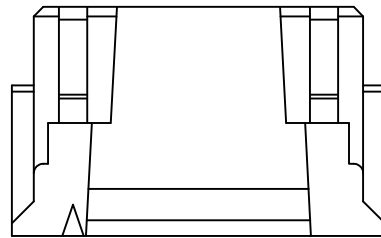

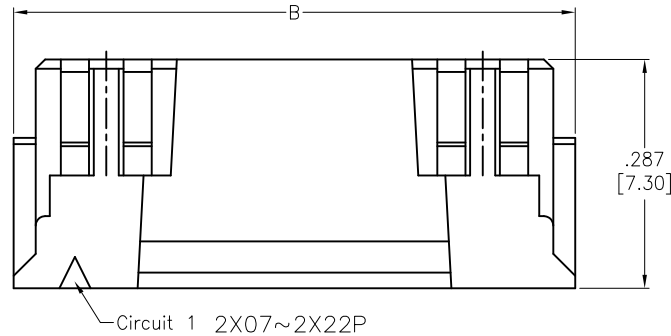


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/26/14	
A		UPDATE DRAWING	5/15/15	AY
B		UPDATE DRAWING	7/10/23	LH/LX

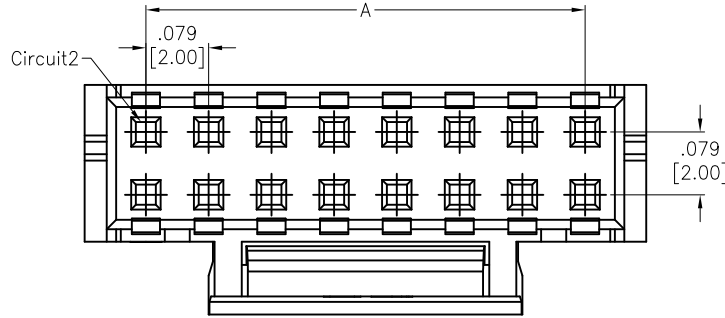

Positions: 04 thru 44

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces + .154 [3.90]

**SPECIFICATIONS:**

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Electrical:

Voltage rating: 250 VAC max

Current rating: 3 Amp AC/DC

Contact resistance: 10 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	∅X	± .10
.XX	± .020	∅XX	± .015
.XXX	± .015	∅XXX	± .010

DRAWN	AY	11/26/14
CHECKED	TW	11/26/14
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH



909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

TITLE			REF:	S00186T	SCALE:	NTS	SHEET	1 OF 1	
.079 [2.00] PITCH HOUSING			SIZE	X	PART NO.	2CHD-D-XX		REV.	-