

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	02/25/13	
A		UPDATE DRAWING	7/2/15	AY/LL
B		UPDATE DIM.	2/15/16	HR
C		UPDATED SPEC.	4/11/23	JJ/LX

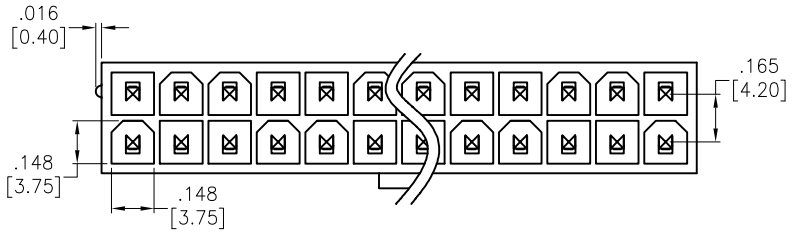

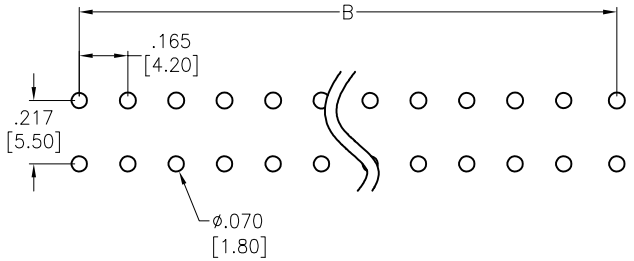

RECOMMENDED PCB LAYOUT

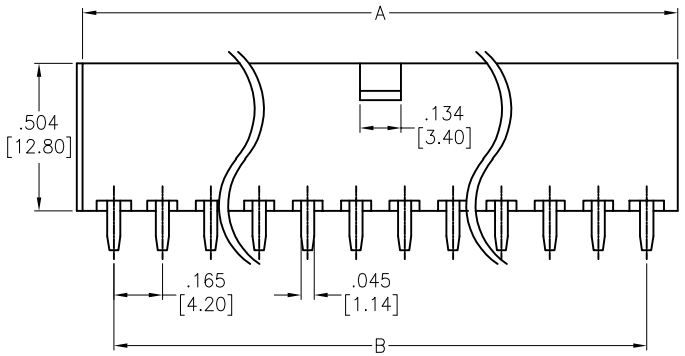



Wire Size AWG	Rated Voltage	CIRCUITS			
		2	4~6	8~10	12~24
#18	250V	9 A	8 A	7 A	6 A
#20		7 A	6 A	5 A	5 A
#22		5 A	4 A	4 A	4 A
#24		4 A	3 A	3 A	3 A

Positions: 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22 & 24
A = .165 [4.20] x No. of Spaces + .213 [5.40]
B = .165 [4.20] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: Natural
Contact: Brass, Tin plated
Electrical:
Voltage rating: 600V AC, DC (R.M.S)
Contact resistance: 10 mohms Max Ⓒ
Insulation resistance: 1000 Mohms
Dielectric withstanding voltage: 1500 VAC for 1 minute
Temperature Rating:
Operating temperature: −40˚ to +105˚C
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

DRAWN	TW	02/25/13
CHECKED	GC	02/25/13
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

TITLE: STRAIGHT HOUSING, MALE TERMINAL PCB MOUNT, NO DRAIN HOLES

SIZE	PART NO.	REV.
X	DMF-XX-S-NDH-V0	C

REF: S00123T | SCALE: NTS | SHEET 1 OF 1