
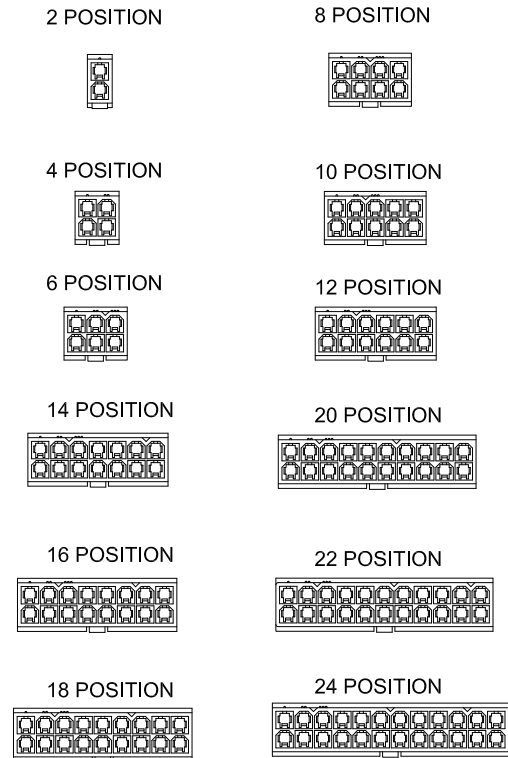


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/22/18	SS
A		UPDATE SPEC.	6/18/19	AY/KC

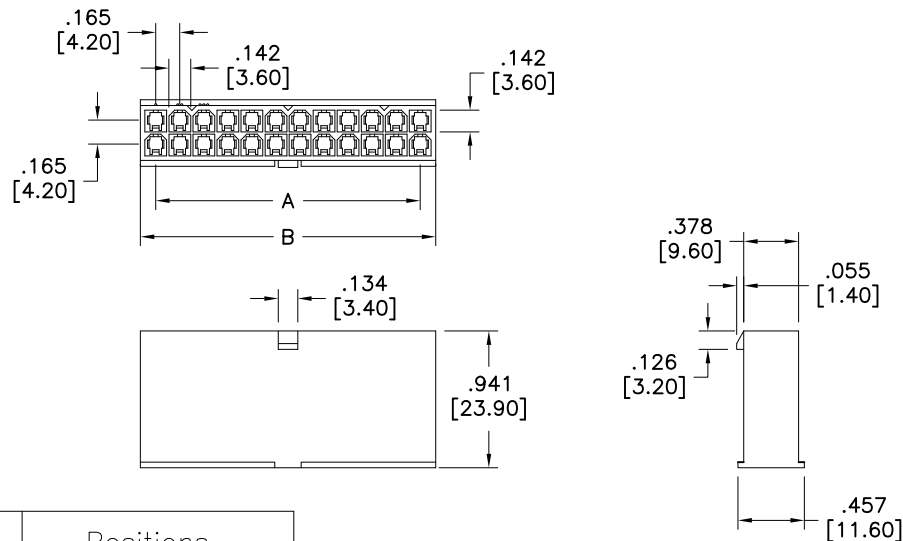

Wire Size AWG	Positions			
	2	4, 6	8, 10	12~24
#18	9A	8A	7A	6A
#20	7A	6A	5A	5A
#22	5A	4A	4A	4A
#24	4A	3A	3A	3A

SPECIFICATIONS:

Material:
 Insulator: Nylon 66, rated UL 94V-2, Glow Wire Compliant
 Insulator color: Natural
 Electrical:
 Operating voltage: 600 VAC max
 Current rating: See chart
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC for 1 minute
 Mechanical:
 Wire size: 18 Awg thru 24 Awg
 Temperature Rating:
 Operating temperature: -40°C to 105°C
 Environmental:
 Lead free, RoHS compliant.



Positions: 2 thru 24
 A = .165 [4.20] X No. of Spaces per row
 B = .165 [4.20] X No. of Positions per row + .047 [1.20]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE		TITLE	
DRAWN	SS	6/22/18		PLUG HOUSING, DUAL ROW, .165 [4.20] PITCH WITHOUT MOUNTING EARS, GLOW WIRE	
CHECKED		SIZE	PART NO.	REV.	
APPROVED		X	DMF-XX-W-NE-GW	A	
REF: S00123T		SCALE: NTS	SHEET 1 OF 1		