

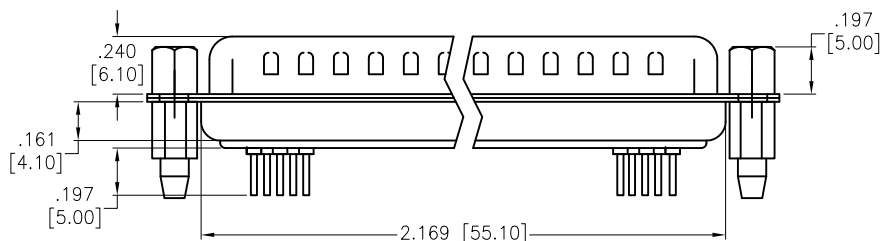
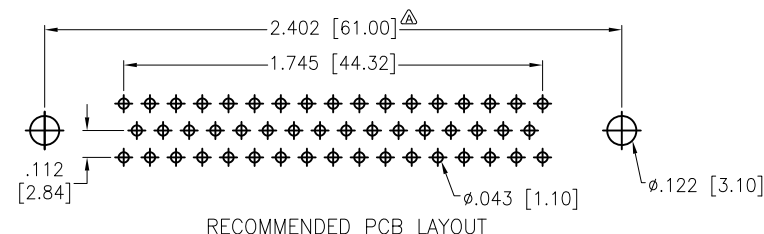


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	05/10/12	
A		UPDATE DIM.	8/12/21	JJ/YC
B		UPDATE DIM.	12/14/22	LH/RZ

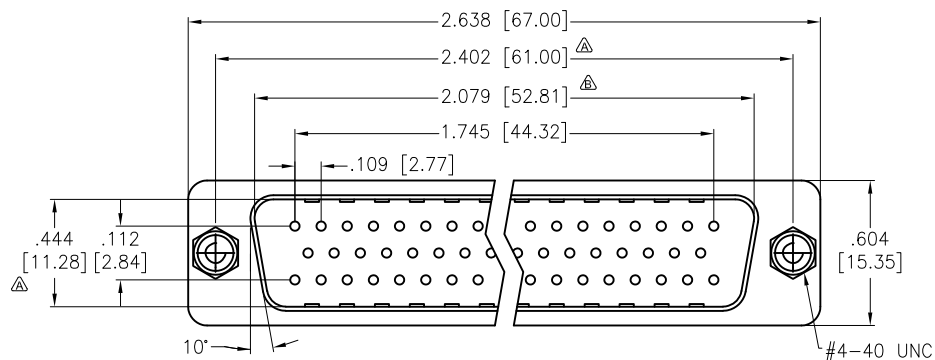

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Shell: Steel, Tin plated

Clinch Nut: Brass, Nickel plated

Boardlock: Brass, Nickel plated

Screwlock: Brass, Nickel plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Environmental:

Lead free, RoHS compliant



Machined Pin

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

DRAWN	TW	05/10/12
CHECKED	AY	05/10/12
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
D-SUB PLUG, RIVETED #4-40 JACKSCREWS
RIVETED #4-40 STANDOFFS W/BOARDLOCKS

SIZE X	PART NO. DD50-PT-1-BL-JS-MC	REV. B
REF: S00087T	SCALE: NTS	SHEET 1 OF 1