


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/26/16	

APPROVED: _____
DATE: _____ TITLE: _____



SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Shell: SPCC, Nickel plated
Boardlock: Copper Alloy, Tin plated
Bracket: Zinc Alloy, Nickel plated
Screw: Copper Alloy, Nickel plated
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Nickel underplate on solder tails
Electrical:
Voltage: 250 VAC(RMS) max
Current rating: 3 Ampere per Contact
Contact resistance: 25 mohms max
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC(RMS) for 1 minute
Temperature Rating:
Operating temperature: -55°C to +85°C
Environmental:
Lead free, RoHS compliant

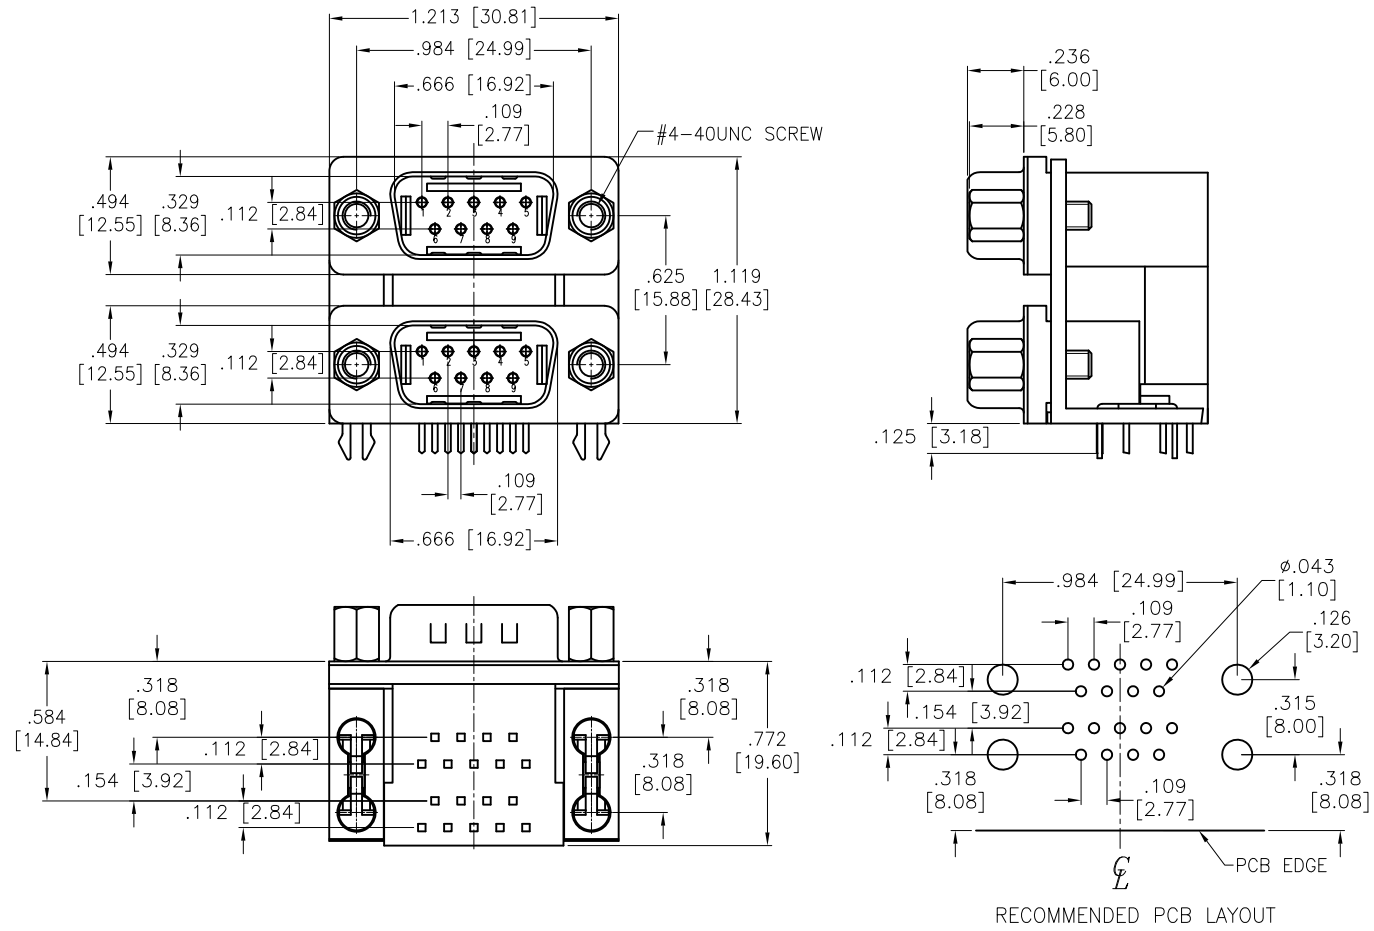

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

.X	± .10	∅X	± .10
.XX	± .020	∅XX	± .015
.XXX	± .015	∅XXX	± .010

APPROVALS		DATE
DRAWN	HR	8/26/16
CHECKED	LW	8/26/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **DUAL PORT D-SUB, MALE / MALE
9 POSITION, BOARDLOCKS, JACKSCREW**

SIZE X	PART NO. DPD-09-11-C3-JS	REV. -
REF: S00027T	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1

6 5 4 3 2 1

D

D

C

C

B

B

A

A