

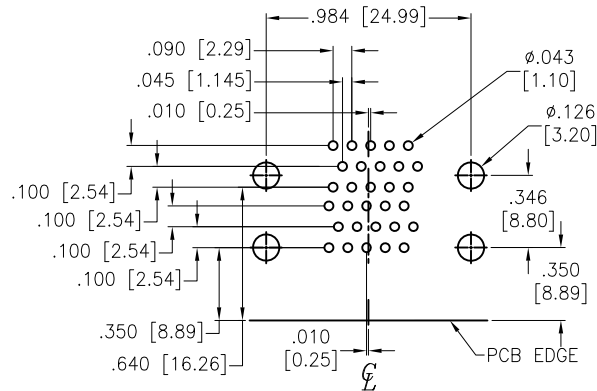
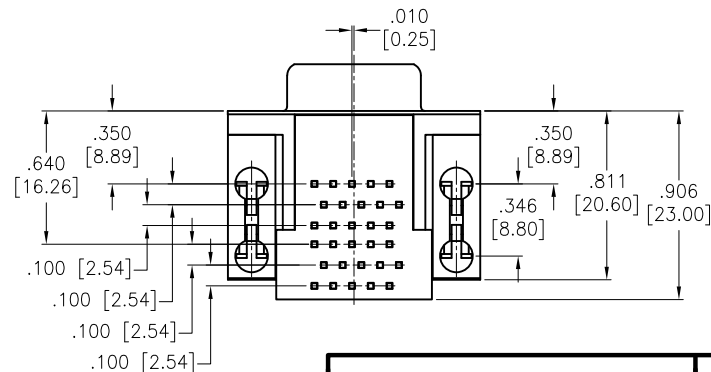


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/26/05	
A		REVISED INSULATOR AND REDRAWN	4/12/06	
B		UPDATE DRAWING	5/11/17	AY/NC
C		UPDATE LAYOUT DRAWING	5/20/20	AY/NP

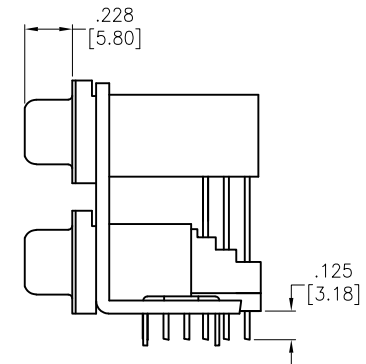

RECOMMENDED PCB LAYOUT

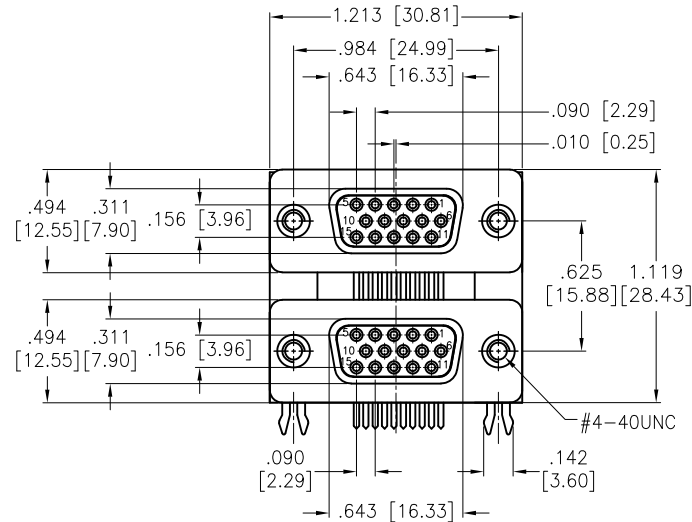

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Shell: SPCC, Nickel plated

Boardlock: Copper Alloy, Tin plated

Bracket: Zinc Alloy, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,
Tin over Nickel underplate on Solder tails

Electrical:

Voltage: 250 VAC (RMS) max

Current rating: 3 Ampere per Contact

Contact resistance: 25 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC RMS

Temperature Rating:

Operating temperature: -55°C to +125°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	SS	8/26/05
CHECKED		
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
**DUAL PORT D-SUB, RIGHT ANGLE, HD
FEMALE / HD FEMALE, 15 POSITION**

SIZE X	PART NO. DPD-HD15-00-C3	REV. C
REF: S00027T	SCALE: NTS	SHEET 1 OF 1