
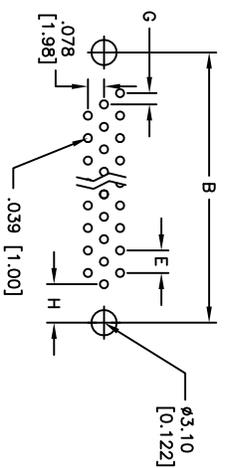




Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/07	

APPROVED: _____
 DATE: _____ TITLE: _____




15 POSITION FEMALE



26,44,62 POSITION FEMALE

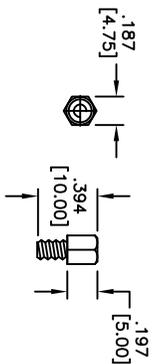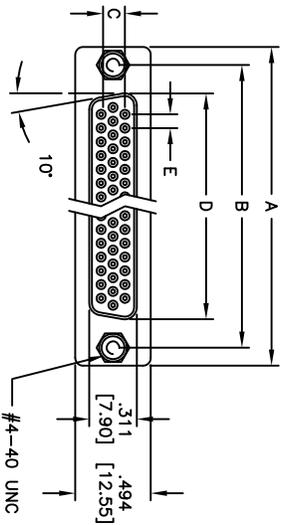

#4-40 UNC SCREWLOCK INSTALLED

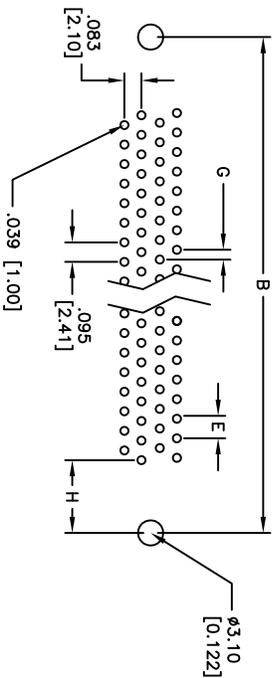

78 POSITION MALE/FEMALE

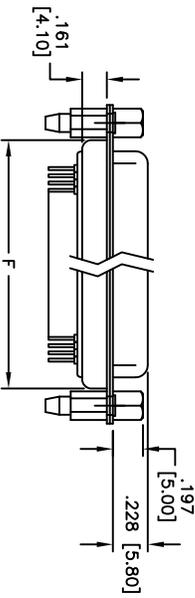

SPECIFICATIONS:

Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold over Nickel underplate on contact area, Tin over Copper underplate on PCB tails
Electrical: Operating voltage: 250 VAC max
 Contact resistance: 3 Amps max
 Insulation resistance: 20 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating: Operating temperature: -65°C to +125°C
Environmental: Lead free, RoHS compliant.

Positions	A	B	C	D	E	F
15	1.213(30.81)	0.984(24.99)	0.156(3.96)	0.643(16.33)	0.090(2.29)	0.756(19.20)
26	1.541(39.14)	1.312(33.32)	0.156(3.96)	0.971(24.66)	0.090(2.29)	1.091(27.70)
44	2.088(53.04)	1.852(47.04)	0.156(3.96)	1.511(38.38)	0.090(2.29)	1.618(41.10)
62	2.729(69.32)	2.50(63.50)	0.156(3.96)	2.159(54.84)	0.095(2.41)	2.256(57.30)
78	2.634(66.90)	2.406(61.11)	0.246(6.24)	2.055(52.20)	0.095(2.41)	2.169(55.10)

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

D-SUB HD DIP STRAIGHT TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	TITLE
TOLERANCES: EXCEPT AS NOTED	D-SUB HD DIP STRAIGHT TYPE
INCHES	SIZE
.X ± .10	X
.XX ± .020	ØXXX
.XXX ± .015	ØXXX
APPROVALS	DATE
DRAWN	SHIREN
CHECKED	
APPROVED	
SCALE: NTS	SHEET 1 OF 1

