






APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/15/15	
A		UPDATE DIM.	10/19/15	AY/GC

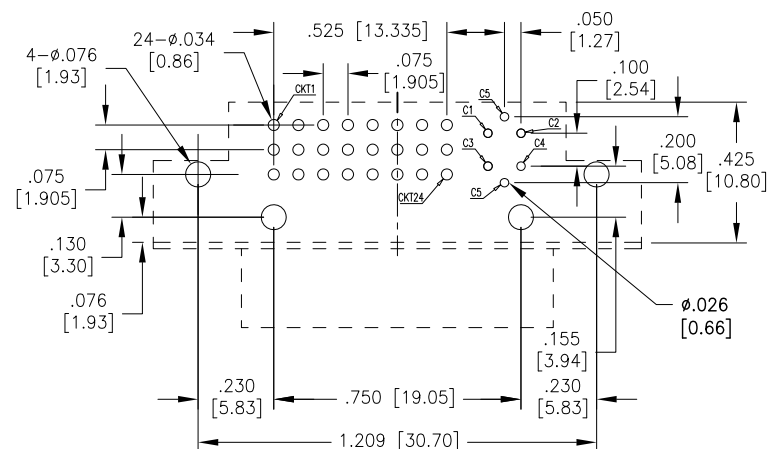

RECOMMENDED PCB LAYOUT

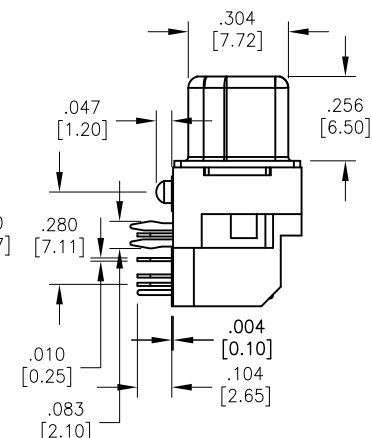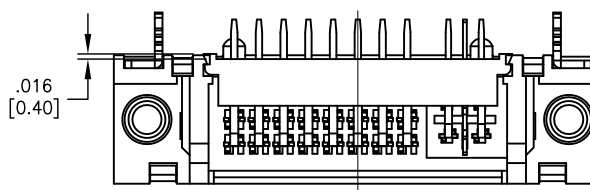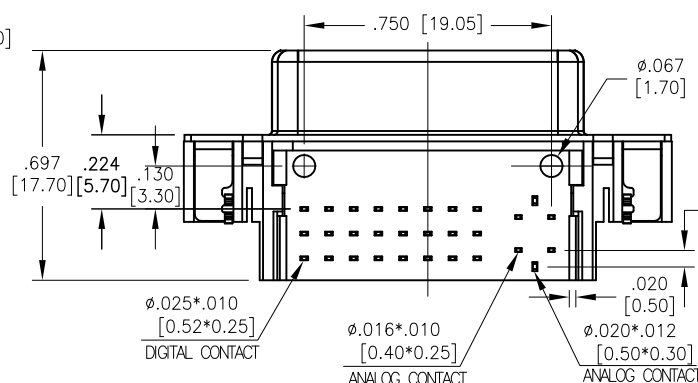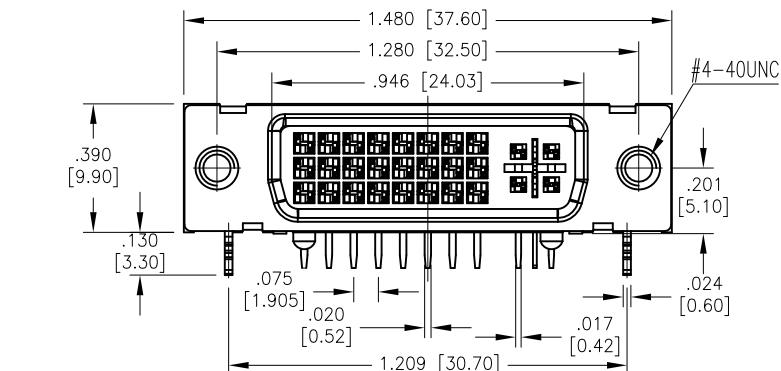

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Ivory

Latch: Hi-Temp Thermoplastic, rated UL 94V-0 color: Ivory

Contacts: Copper Alloy

Shell: SPCC, Nickel plated

Boardlock: SPCC, Tin plated

Plating:

30u" Gold over Nickel underplate on mating area,

Tin over Nickel underplate on tails

Electrical:

Voltage: 40 VAC max

Current rating: 1.5 Ampere per Contact

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VDC (rms)

Temperature Rating:

Operating temperature: -55°C to +85°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES		TITLE DIGITAL VIDEO INTERFACE SOCKET RIGHT ANGLE, PCB TAILS, ANALOG	
HOLES		SIZE X	
.X ± .10	Ø.X ± .10	PART NO. DVI-SL-24-2-30-HT-T/R	REV. A
.XX ± .020	Ø.XX ± .015	REF: S00027T	SCALE: NTS
.XXX ± .015	Ø.XXX ± .010	SHEET 1 OF 2	
APPROVALS		DATE	
DRAWN	HR	7/15/15	
CHECKED	GC	7/15/15	
APPROVED			

