
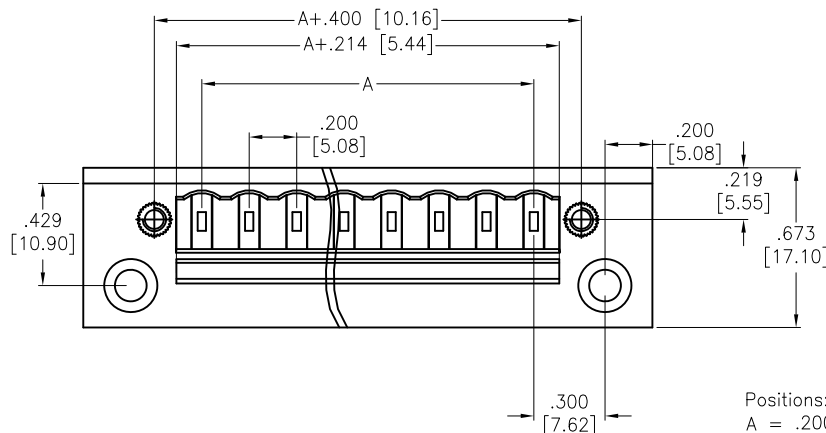
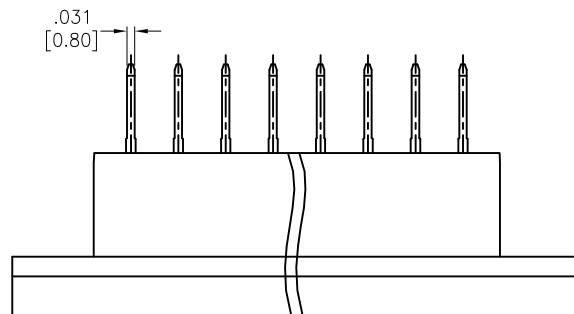
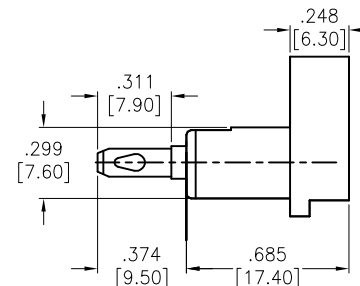


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/1/15	
A		UPDATE DRAWING	10/8/21	WX/NL

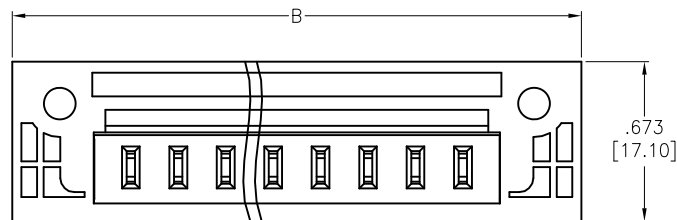

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Copper Alloy, Tin plated

Screw: M2.5 Brass

Electrical:

Voltage rated: 300 VAC

Current rated: 15 Amps

Withstanding voltage: 1,600 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A = .200 [5.08] x No. of Spaces

B = .200 [5.08] x No. of Spaces + .100 [25.40]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	HR	9/1/15
CHECKED	MW	9/1/15
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE		EURO TERMINAL BLOCK, .200 [5.08] PITCH		
SIZE	PART NO.	REV.		
X	EB157A-XX-D	A		
REF:	S00067C	SCALE:	NTS	SHEET 1 OF 1