



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/14/17	
A		UPDATE SPEC.	12/29/17	AY/RT
B		UPDATED DRAWING	11/2/22	JJ/RL

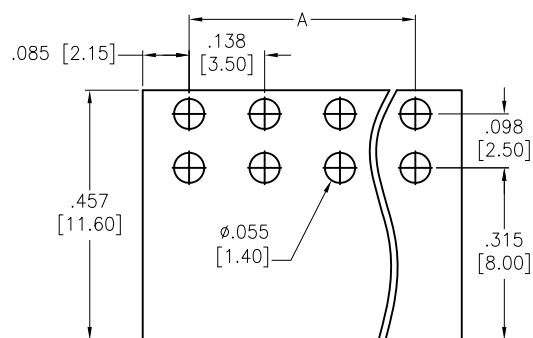

RECOMMENDED PCB LAYOUT

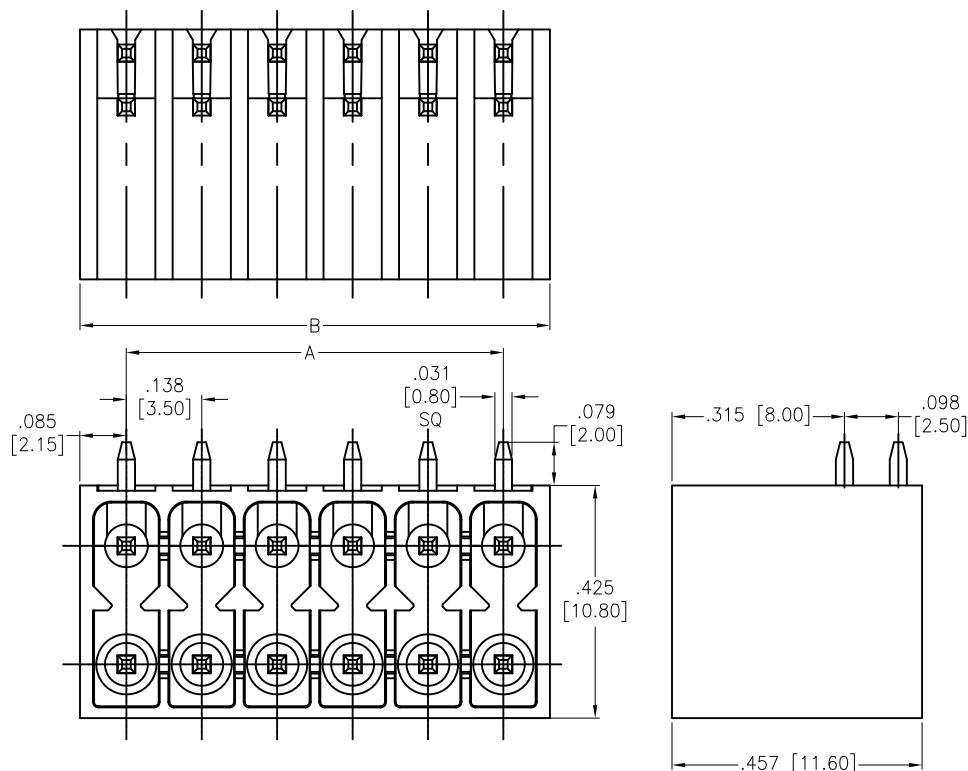

Poles: 2*02 thru 2*24P

A = .138 [3.50] X No. of Spaces

B = .138 [3.50] X No. of Spaces + .169 [4.30]

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contact: Copper Alloy, Tin plated

Electrical:

Voltage rating: 150 V

Current rating: 8 A

Dielectric withstanding voltage: 1300 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +130°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	ØX ±.10
.XX ±.020	ØXX ±.015
.XXX ±.015	ØXXX ±.010

DRAWN	JJ	11/2/22
CHECKED	RL	11/2/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE EURO BLOCK, .138 [3.50] PITCH, RIGHT ANGLE		
SIZE X	PART NO. EB168A-XX-A-90	REV. B
REF: S00067C	SCALE: NTS	SHEET 1 OF 1