

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date

Appr

-

RELEASED

6/12/19

D

D

C






C

B

B

A

A

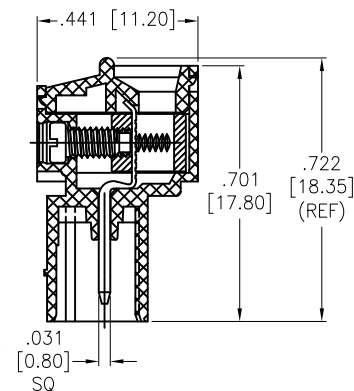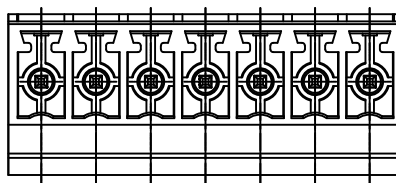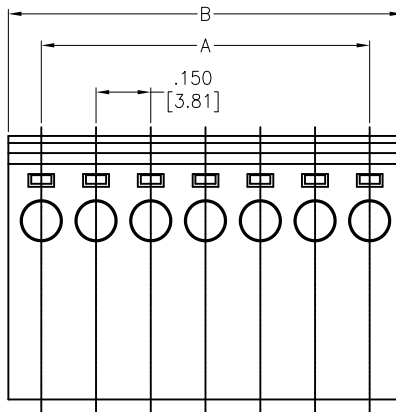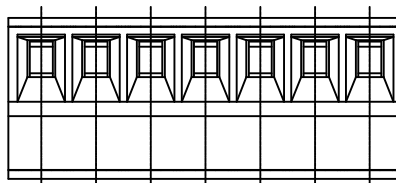

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contacts: Copper Alloy, Tin plated

Screw: M2

Electrical:

Voltage rating: 300 V

Current rating: 8 A

Dielectric withstanding voltage: 1,600V for 1 minute

Mechanical:

Torque: 0.2N-m

Wire Range: 28-16AWG

Strip length: 6-7mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A= .150 [3.81] x No. of Spaces

B= .150 [3.81] x No. of Spaces + .181 [4.60]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS

DATE

DRAWN

OW

6/12/19

CHECKED

IL

6/12/19

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

EURO BLOCK, .150 [3.81] PITCH

SIZE
X

PART NO.

EB86A-XX-B

REV.
-

REF: S00067C

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1