
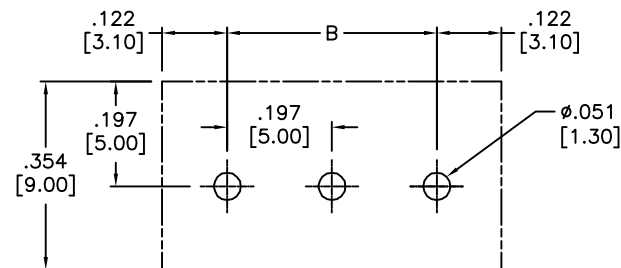




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/12	
A		UPDATE DRAWING	10/6/17	AY/IC

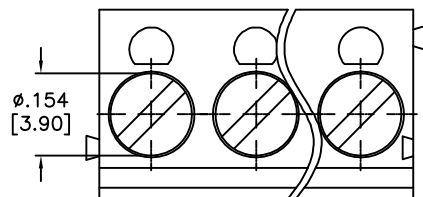

RECOMMENDED P.C.B LAYOUT

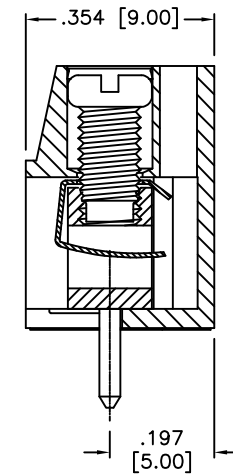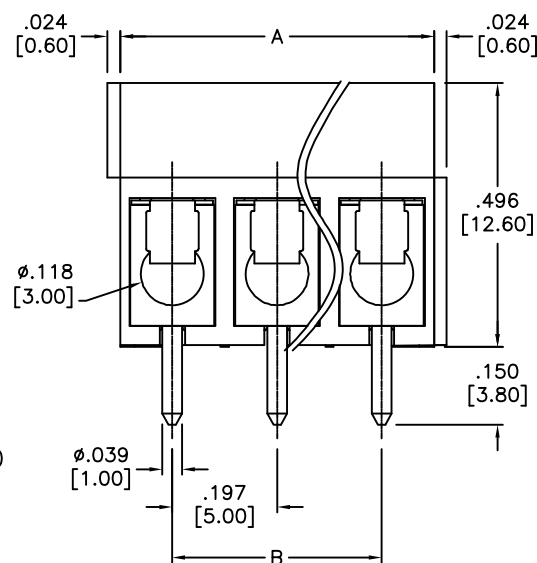

SPECIFICATIONS:

Material:

Insulator: Thermoplastic, rated UL 94V-0

Insulator color: Blue

Wire guard: Stainless Steel

Contact: Brass, Tin plated

Screw: Steel, M3/Zn plated

Electrical:

Voltage rating: 250 VAC

Current rating: 16 Amp

Withstanding Voltage: 1.5KV

Mechanical :

Wire range: 0.5-2.5mm²

Solid wire(AWG): 14-26

Stranded wire(AWG): 14-26

Torque: 2.6 Lb-In/0.5Nm

Wire strip length: 6-7mm

Temperature Rating:

Operating temperature: -40°C to +115°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A = .197 [5.00] x No. of Positions

B = .197 [5.00] x No. of Spaces

	Dim A	Dim B
2-6P	±.006 [0.15]	±.004 [0.10]
7-12P	±.008 [0.20]	±.008 [0.20]
13-18P	±.012 [0.30]	±.010 [0.25]
19-24P	±.016 [0.40]	±.012 [0.30]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS DATE

DRAWN	AY	4/6/12
-------	----	--------

CHECKED	OC	4/6/12
---------	----	--------

APPROVED		
----------	--	--

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.197" [5.00] PITCH, TERMINAL BLOCK

SIZE X	PART NO. EBA-XX-C-BU	REV. A
-----------	-------------------------	-----------

REF: S00007T SCALE: NTS SHEET 1 OF 1