
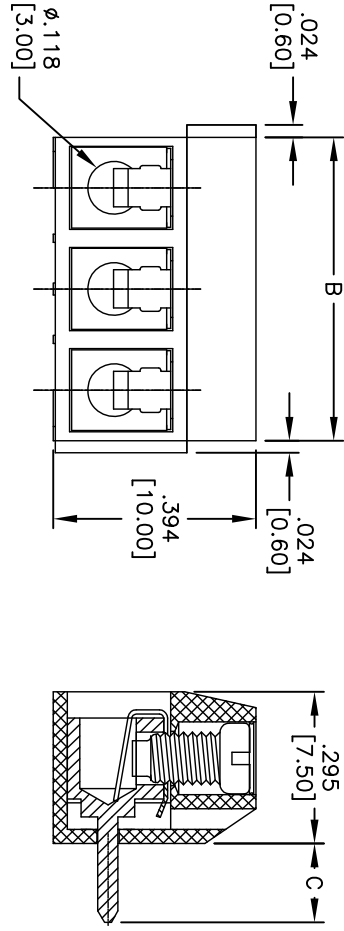


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/14/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

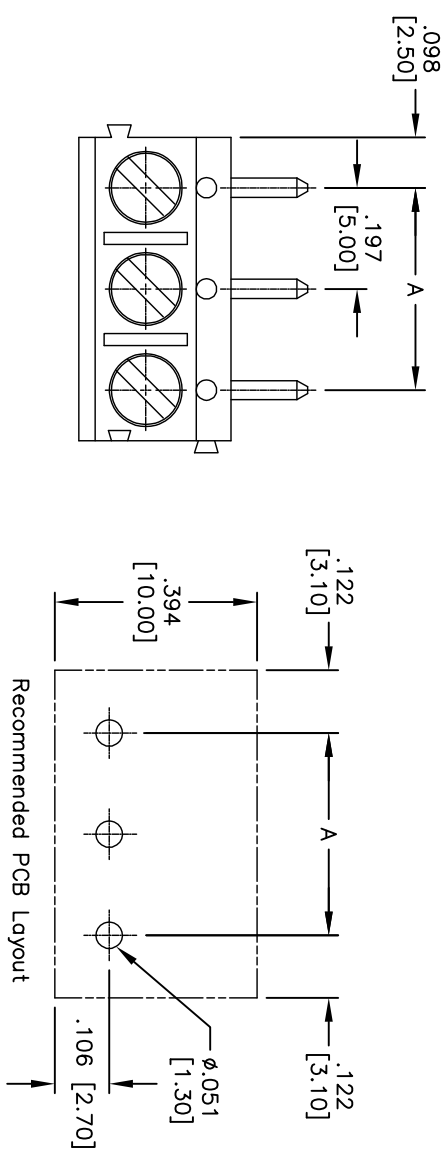

	Dim C	Dim A&B
2-6P	±.006 [0.15]	±.008 [0.20]
7-12P	±.008 [0.20]	±.010 [0.25]
13-18P	±.010 [0.25]	±.012 [0.30]
19-24P	±.012 [0.30]	±.016 [0.40]

Positions: 2 thru 24  
 A = .197 [5.00] x No. of Spaces  
 B = .197 [5.00] x No. of Positions

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, .197 [5.00] PITCH  
 COLOR: BLACK

**SPECIFICATIONS:**

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Black
- Contact: Brass, Tin plated
- Wire guard: Stainless Steel
- Electrical: Operation voltage: 250 VAC
- Current rating: 16 Amps
- Solid wire (AWG): 14-22
- Stranded wire (AWG): 14-22
- Withstanding Voltage: 1.5KV
- Wire strip length: 5-6mm
- Environmental: Operating temperature: -40°C to +115°C
- Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM [INCHES]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES

.X	±.10	ØXX	±.10
.XX	±.020	ØXXX	±.015
.XXX	±.015	ØXXXX	±.010

APPROVALS: \_\_\_\_\_ DATE: \_\_\_\_\_

DRAWN	AY	6/14/11
CHECKED	AH	6/14/11
APPROVED		

SIZE	PART NO.	REV.
X	EBE-XX-C	
REF:	S00007T	SHEET 1 OF 1
SCALE:	NIS	