
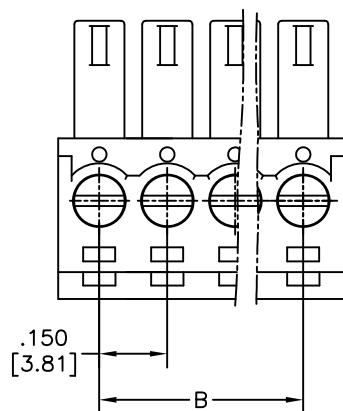





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/26/10	
A		UPDATE DRAWING	9/22/17	AY/RT

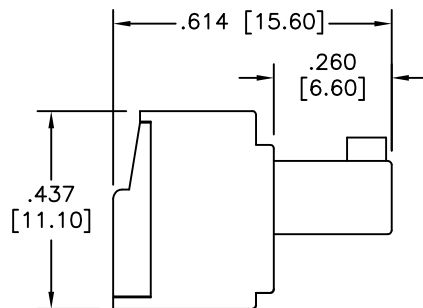

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Wire Guard: Copper Alloy

Terminal Body: Copper Alloy

Screw: Steel

Electrical:

Voltage rating: 300V

Current rating: 8 Amp

Insulation resistance: 5000 Mohms min @ 500VDC

Dielectric withstanding voltage: 2000 VAC for 1 minute

Mechanical:

Screw Torque Value: 2.0 lbf-in

Suitable Electric Wire: 14-24 AWG

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Poles: 02 thru 24

A = .150 [3.81] x No. of Poles + .031 [0.79]

B = .150 [3.81] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS DATE

DRAWN DY 5/26/10

CHECKED

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
PLUGGABLE BLOCK, PITCH .150 [3.81]

2 THRU 24 POLES

SIZE X	PART NO. EBK-XX-B	REV. A
-----------	----------------------	-----------

REF: S00026C SCALE: NTS SHEET 1 OF 1