
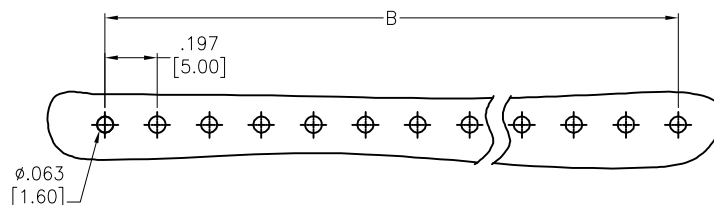


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/13/07	
A		UPDATE DRAWING	5/24/23	LH/KC

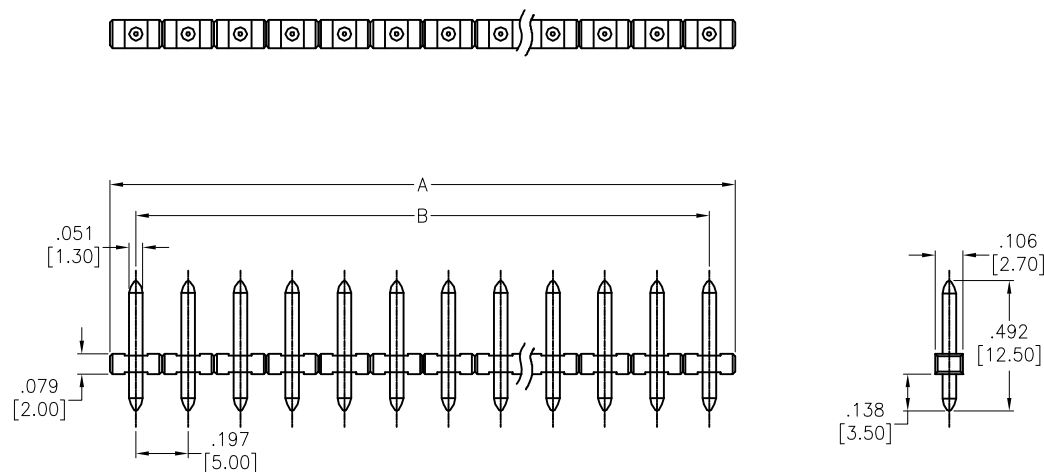

RECOMMENDED PCB LAYOUT

Positions: 02 thru 24

A= .197 [5.00] x No. of Positions per Row

B= .197 [5.00] x No. of Space

	Tolerance
2-5P	$\pm .004$ [0.10]
6-9P	$\pm .006$ [0.15]
10-13P	$\pm .008$ [0.20]
14-17P	$\pm .010$ [0.25]
18-21P	$\pm .012$ [0.30]
22-24P	$\pm .016$ [0.40]

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Electrical:

Voltage rating: 300 V

Current rating: 15 A

Dielectric withstanding voltage: 1600 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +115°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X $\pm .10$	ϕ .X $\pm .10$
.XX $\pm .020$	ϕ .XX $\pm .015$
.XXX $\pm .015$	ϕ .XXX $\pm .010$

DRAWN	SS	6/13/07
CHECKED		
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE		PUGGABLE HEADER, 5.00MM 2 THRU 24 PINS	
SIZE	PART NO.	REV.	
X	EBT-XX-C	A	
REF:	S00007T	SCALE:	NTS
SHEET 1 OF 1			