
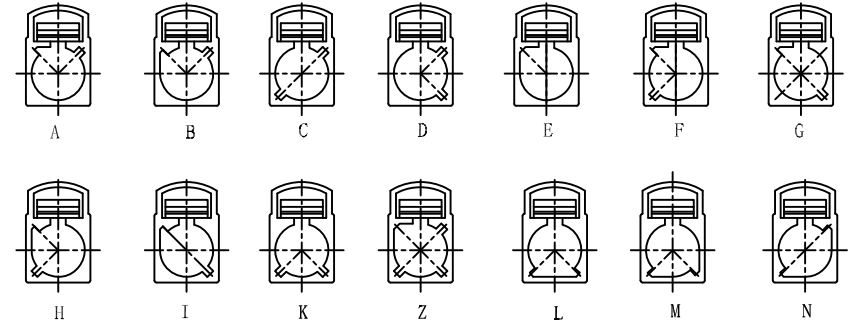

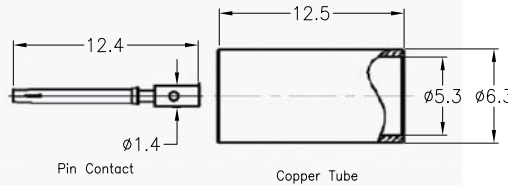
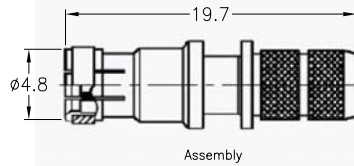

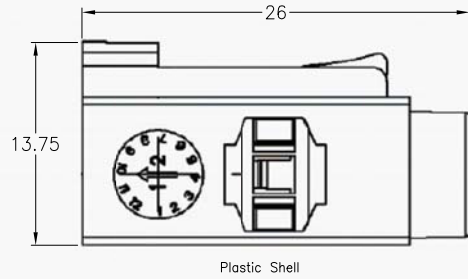


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/5/21	



Port Type

Type	Color	For Cable	Item No
A	BLACK	RG58	RF55-56A-T-01-50-SH
B	WHITE		RF55-56B-T-01-50-SH
C	BLUE		RF55-56C-T-01-50-SH
D	BORDEAUX VIOLET		RF55-56D-T-01-50-SH
E	GREEN		RF55-56E-T-01-50-SH
F	BROWN		RF55-56F-T-01-50-SH
G	GREY		RF55-56G-T-01-50-SH
H	VIOLET		RF55-56H-T-01-50-SH
I	BEIGE		RF55-56I-T-01-50-SH
K	CURRY		RF55-56K-T-01-50-SH
Z	WATER BLUE		RF55-56Z-T-01-50-SH
L	CARMINE RED		RF55-56L-T-01-50-SH
M	PASTEL ORANGE		RF55-56M-T-01-50-SH
N	PASTEL GREEN		RF55-56N-T-01-50-SH

PLASTIC SHELL	PA66+30%GF	
SNAP RING	PA66+30%GF	
SNAP RING	BERYLLIUM COPPER	
COPPER TUBE	BRASS	NICKEL
INSULATOR	PTFE	
PIN CONTACT	BERYLLIUM COPPER	GOLD
BODY	BRASS	NICKEL
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:

Electrical:

Frequency range: DC~6 GHz
Nominal Impedance: 50 ohms
VSWR: < 1.3

Withstanding voltage: 1000 V
Insulator Resistance: 1000 MΩ
Contact Resistance: 6 Milliohms max. (Center Contact)
1 Milliohms max. (Outer Contact)

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

MM			
0-6	± 0.15	50-80	± 0.35
6-18	± 0.20	80-120	± 0.50
18-30	± 0.25	120-180	± 0.80
30-50	± 0.30	180-250	± 0.95

DRAWN	LH	5/5/21
CHECKED	TY	5/5/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
**FAKRA JACK SMB TYPE STRAIGHT
FOR RG58**

SIZE X	PART NO. RF55-56X-T-01-50-SH	REV. -
REF: S00134C	SCALE: NTS	SHEET 1 OF 1