
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/3/05	
A		REDRAW & REVISED	4/07/06	
B		REMOVE STRAIN RELIEF	2/10/09	
C		REDRAWN	10/28/11	
D		UPDATE DRAWING	4/13/16	AY

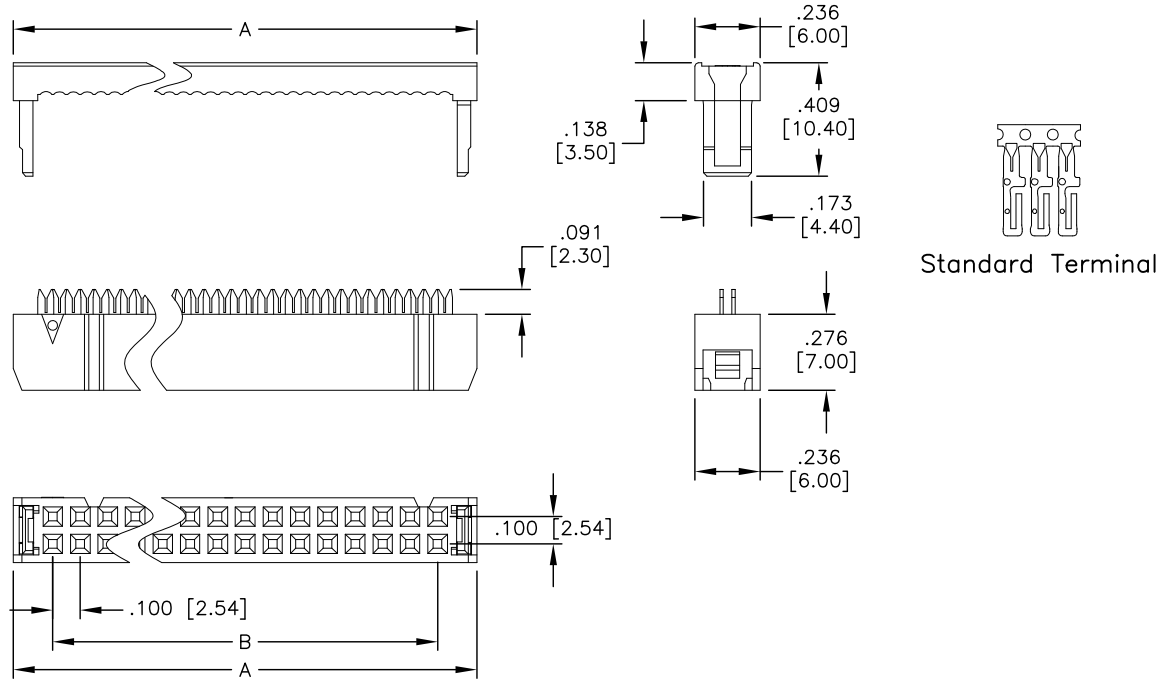

Standard Terminal

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel on contact area
Tin over Copper underplate on IDC area
Electrical:
Operating voltage: 250 VAC max.
Current rating: 1 Amp max.
Contact resistance: 20 mohms max.
Insulation resistance: 5,000 Mohms min @ 500 VDC.
Dielectric withstanding voltage: 500 VAC for 1 minute
Environmental:
Lead free, RoHS compliant

Positions: 6 thru 20, 24, 26, 30, 34, 36, 40, 44, 50, 56, 60, 62, & 64
A = .100 [2.54] x No. of Spaces per Row + .285 [7.24]
B = .100 [2.54] x No. of Spaces per Row

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	6/3/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] FLAT CABLE IDC SOCKET
STANDARD SINGLE WIPE CONTACTS

SIZE	PART NO.	REV.
X	FCS-XX-SG-N	D

REF:	SCALE:	SHEET
S00087T	NTS	1 OF 1