
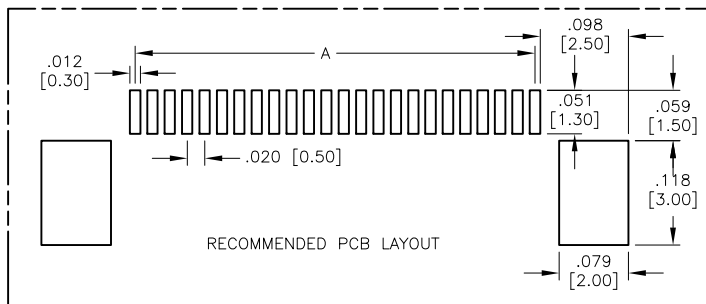


APPROVED: _____

DATE: _____ TITLE: _____

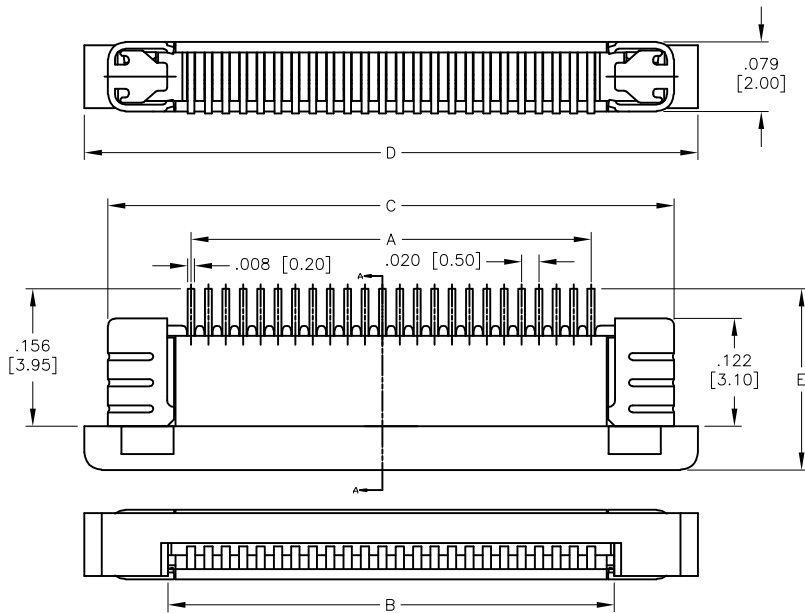

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0, White

Latch: Hi-temp thermoplastic, rated UL 94V-0, Black

Contact: Phosphor Bronze

Fitting Nail: Copper Alloy, Tin plated

Plating:

Tin over Copper underplate overall.

Electrical:

Operating voltage: 50 VAC/DC

Current rating: 0.4 A AC/DC

Contact resistance: 30 mohms Max.

Insulation resistance: 500 mohms Min.

Withstand Voltage: 250V AC/minute

Temperature Rating:




Operating temperature: -45°C to +85°C

Environment:

Lead free, RoHS compliant.



Rev	AWO #	Description	Date	Appr
-		RELEASED	10/13/11	
A		REVISED SPEC.	12/10/12	
B		UPDATED DIM.	3/16/15	HR/AY
C		UPDATED SPEC.	4/7/15	AY/GC
D		UPDATED DIM.	12/1/16	HR/MC

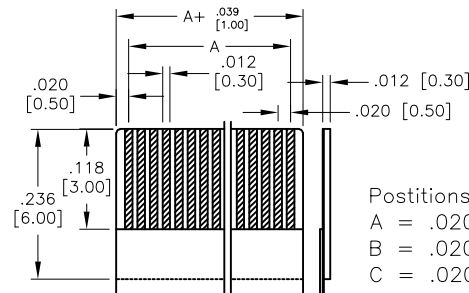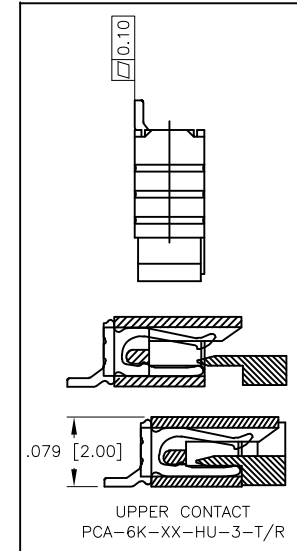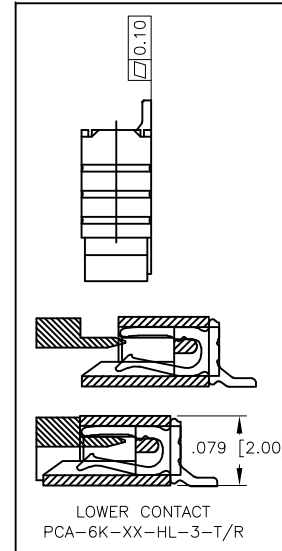

APPLICABLE FPC/FFC
RECOMMENDED DIMENSION

Positions: 4 thru 60

A = .020 [0.50] x No. of Spaces

B = .020 [0.50] x No. of Positions + .024 [0.60]

C = .020 [0.50] x No. of Positions + .181 [4.60]

D = .020 [0.50] x No. of Positions + .220 [5.60]

E = .207 [5.25].....4 thru 34

.226 [5.75].....35 thru 60

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	10/13/11
CHECKED	SC	10/13/11
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
ZIF FLEX CIRCUIT CONNECTOR
SIDE ENTRY, SMT TYPE

SIZE	PART NO.	REV.
X	PCA-6K-XX-HX-3-T/R	D
REF: S00167T		SCALE: NTS
		SHEET 1 OF 1