

6

5

4




3

2

1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/24/06	
A	9633	REDRAWN	5/12/09	
B		REDRAWN	9/23/10	

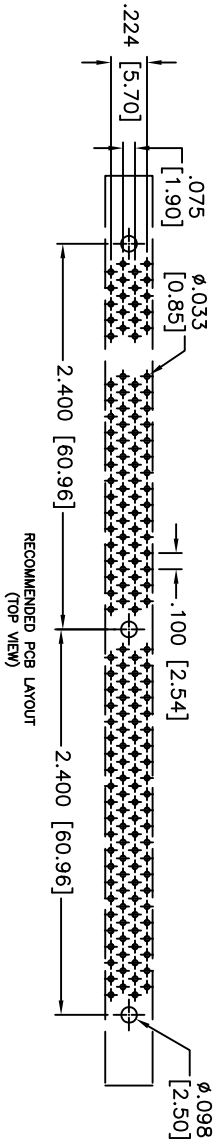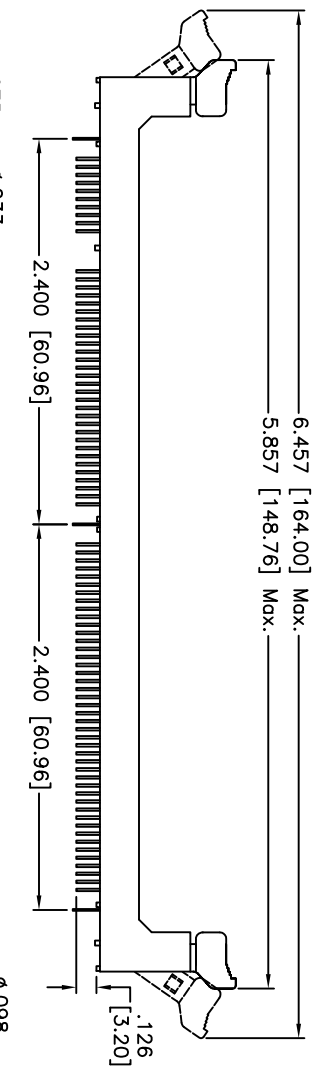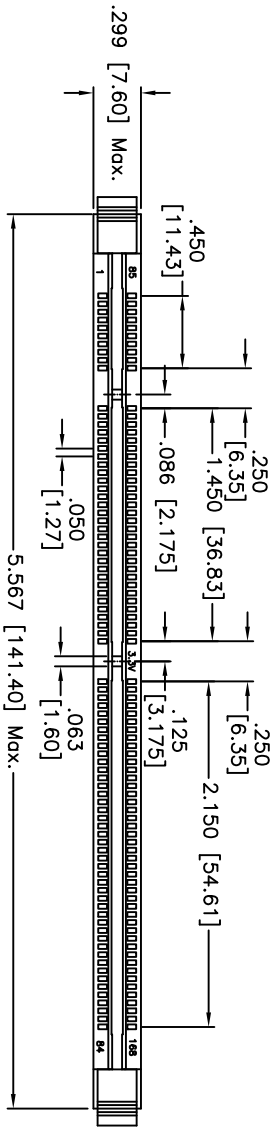

SPECIFICATIONS:

- Material: Insulator: Hi-Temperature thermoplastic, rated UL 94V-0
- Insulator color: Black
- Contacts: Copper Alloy
- Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on solder tails
- Electrical: Operating voltage: 250 VAC max
- Current rating: 1 Amp max
- Contact resistance: 30 mohms max
- Insulation resistance: 1000 Mohms min
- Dielectric Withstanding Voltage: AC 500V for 1 minute.
- Temperature Rating: Operating temperature: -25°C to +105°C
- Environmental: Lead free, RoHS compliant.

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

DIMM CONNECTOR, 168 POSITION VERTICAL, 3.3V

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	SS	5/24/06	
CHECKED			
APPROVED			
SIZE	PART NO.	TITLE	REV.
X	DIMM-168-V-1	DIMM CONNECTOR, 168 POSITION VERTICAL, 3.3V	B
REF:	S0012T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1