Rev	AWO #	Description	Date	Appr
-		RELEASED	3/4/13	

APPROVED: _____

DATE: _____ TITLE: _____

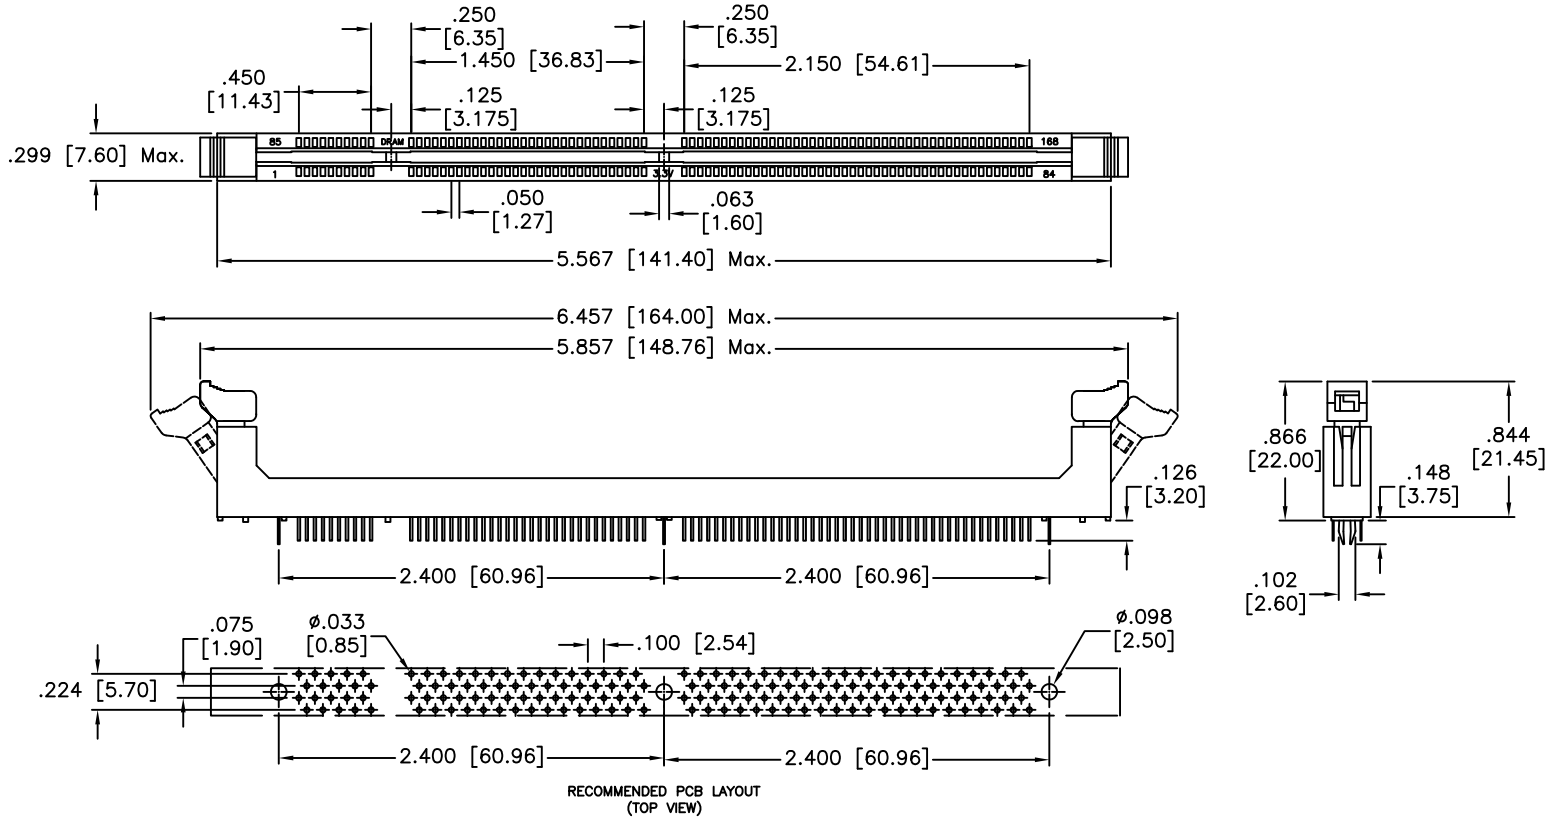

RECOMMENDED PCB LAYOUT
(TOP VIEW)

SPECIFICATIONS:
Material:
Insulator: Hi-Temperature thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Plating:
Gold Flash over Nickel underplate on contact area,
Tin over Copper underplate on solder tails
Electrical:
Operating voltage: 250 VAC max
Current rating: 1 Amp max
Contact resistance: 30 mohms max
Insulation resistance: 1000 Mohms min
Dielectric Withstanding Voltage: AC 500V for 1 minute.
Temperature Rating:
Operating temperature: -25°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	3/4/13
CHECKED	YC	3/4/13
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIMM CONNECTOR, 168 POSITION VERTICAL, 3.3V, DRAM

SIZE	PART NO.	REV.
X	DIMM-168-V-1-DRAM	-

REF: S00127T | SCALE: NTS | SHEET 1 OF 1