

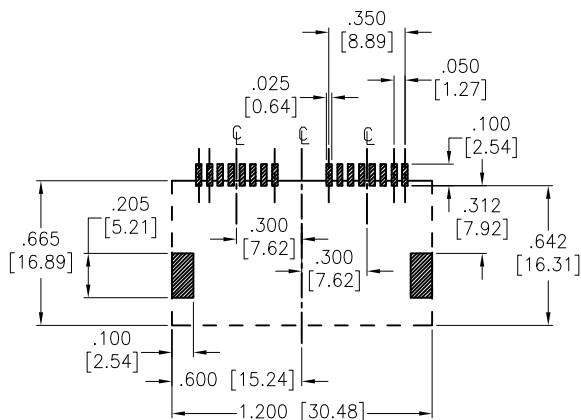
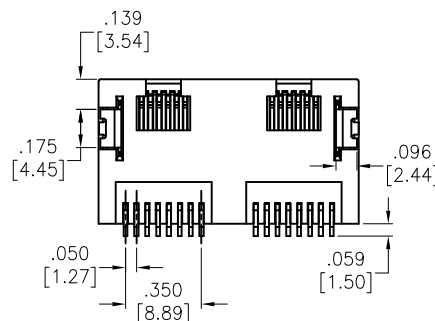

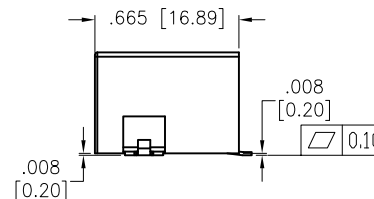


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/10/17	

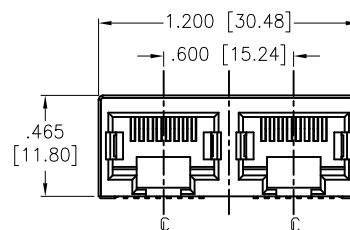

RECOMMENDED PCB LAYOUT

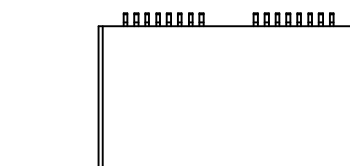

X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold
6	6 µin Gold

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Contacts Plating:
 Round contact
 Gold over Nickel underplate overall
 Flat contact
 Gold over Nickel underplate on contact area,
 Tin over Nickel underplate on solder tails
 (See chart for thickness)

Electrical:
 Voltage rating: 150 VAC rms
 Current rating: 1.5 Amp
 Contact Resistance: 20 mohms max.
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,500 VDC or 1,000 VAC RMS @ 0.5 mA for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710				
.X	± .10	Ø.X	±.10	TITLE				
.XX	± .020	Ø.XX	±.015					
.XXX	± .015	Ø.XXX	±.010					
APPROVALS			DATE		MODULAR JACK GANGED, 2PORT, 8P8C			
DRAWN		AY	7/10/17					
CHECKED		YC	7/10/17					
APPROVED								
REF: S00005C				SCALE: NTS		SHEET 1 OF 1		