
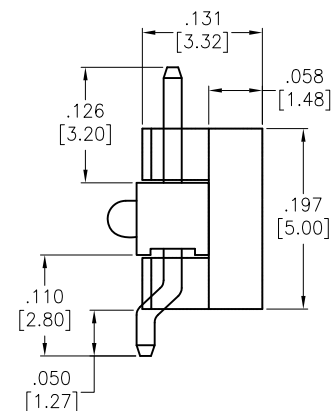
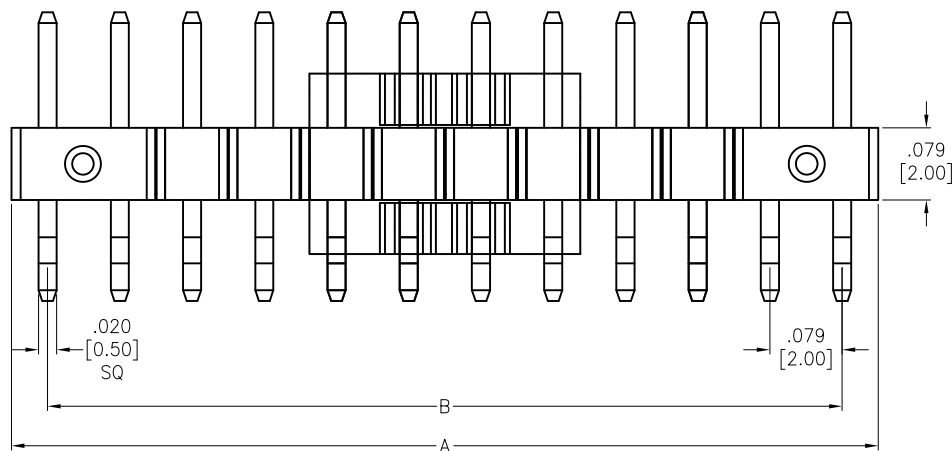
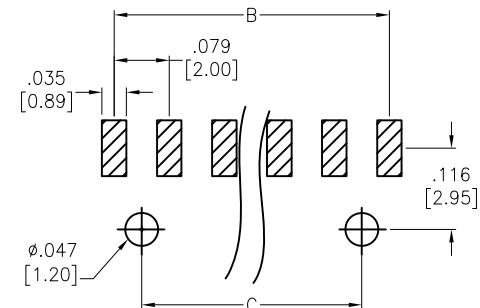


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/18	

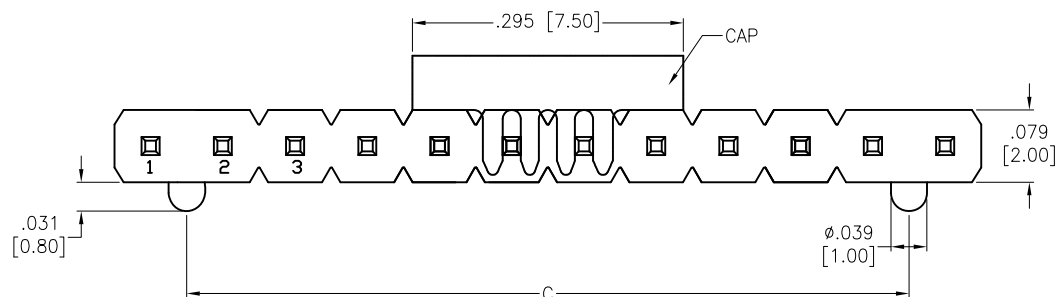

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Nickel underplate on solder tails

Electrical:

Current rating: 2 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 01 thru 40

A = .079 [2.00] x No. of Positions

B = .079 [2.00] x No. of Spaces

C = .079 [2.00] x No. of Spaces - .079 [2.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	AY	11/30/18
CHECKED	OC	11/30/18
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE .079 [2.00] SINGLE ROW PIN HEADER, R/A
SMT TYPE, SEL-GOLD PLATED, W/PEG

SIZE	PART NO.	REV.
X	2PH1RB-XX-SG-SMT-.126-P-PP-T/R	-
REF:	S00111C	SCALE: NTS
SHEET 1 OF 1		