
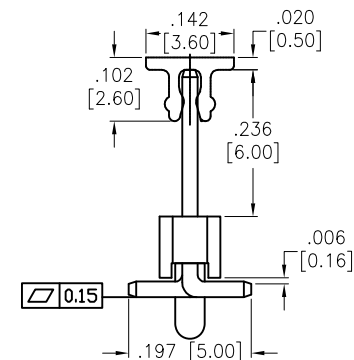
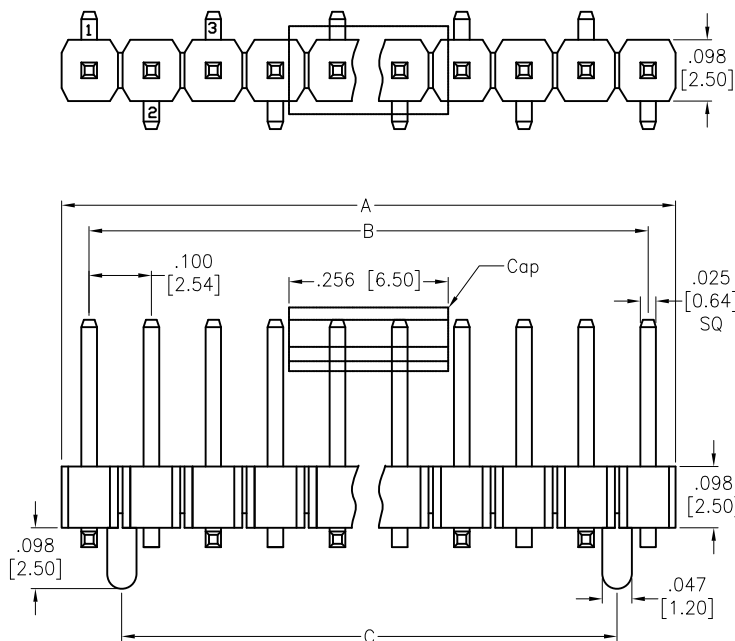


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/8/21	

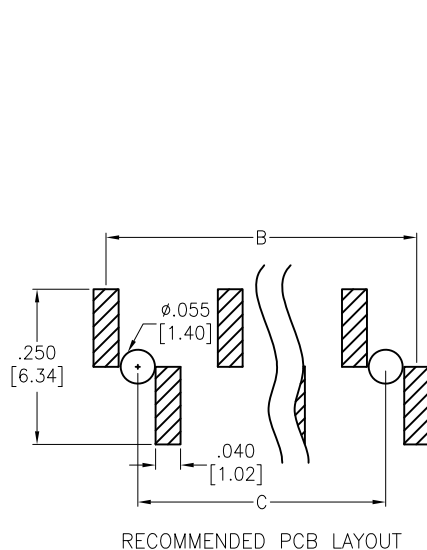

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 3 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 01 thru 40

A = .100 [2.54] x No. of Positions - .012 [0.30]

B = .100 [2.54] x No. of Spaces

C = .100 [2.54] x No. of Spaces - .100 [2.54]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

DRAWN	WX	10/8/21
CHECKED	LW	10/8/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.100 [2.54] SINGLE ROW PIN HEADER, SMT,
TYPE A, GOLD PLATED, W/ PEG

SIZE X	PART NO. PH1-XX-UA-SMT-A-P-PP-T/R-Y	REV. -
REF: S00111C	SCALE: NTS	SHEET 1 OF 1