

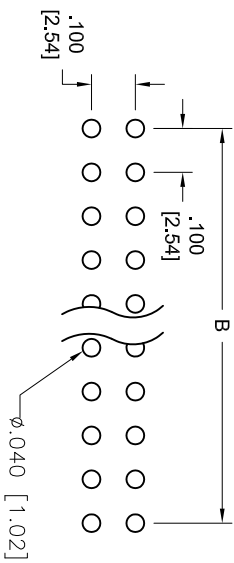
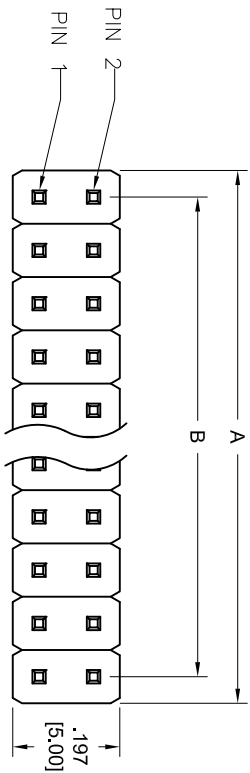


Rev	AWO #	Description	Date	Appr
-		RELEASED	03/18/05	

APPROVED: _____
 DATE: _____ TITLE: _____



RECOMMENDED PCB LAYOUT

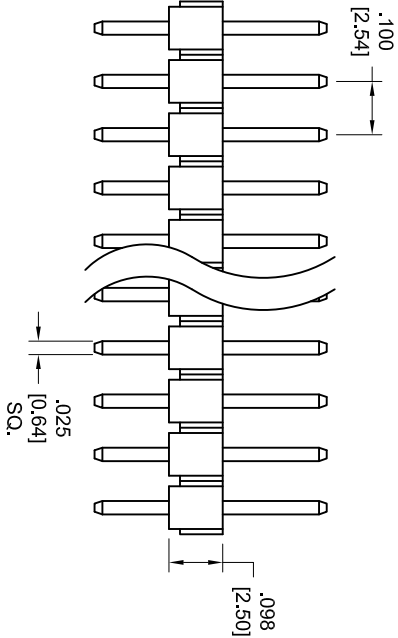

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
Contacts: Brass
Plating:
 Gold flash over Nickel underplate overall
Electrical:
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max. Initial
 Insulation resistance: 5,000 Mohms min @ 500 VDC
 Temperature Rating:
 Operating temperature: -40°C to +105°C
Environmental:
 Lead free, RoHS compliant.

Positions: 04 thru 80
 A = .100 [2.54] X No. of Positions
 B = .100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 DUAL ROW PIN HEADER, .100" [2.54mm]
 PITCH, GOLD PLATED

SIZE	PART NO.	REV.
X	PH2-XX-UA-HT	-
REF:	S00039T	SHEET 1 OF 1
SCALE:	NTS	

