

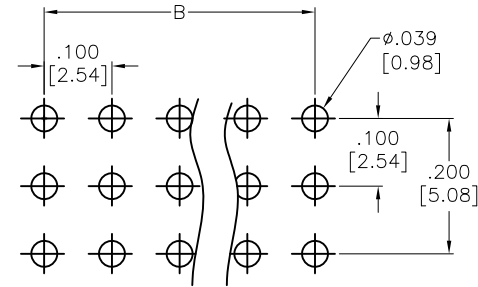
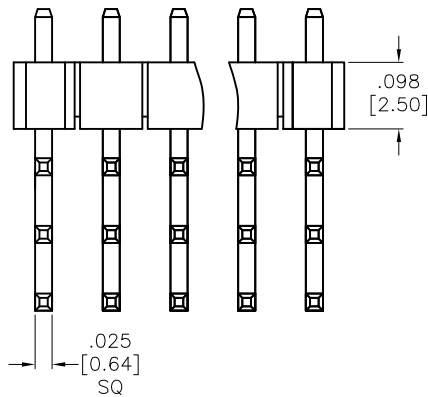


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/15/19	

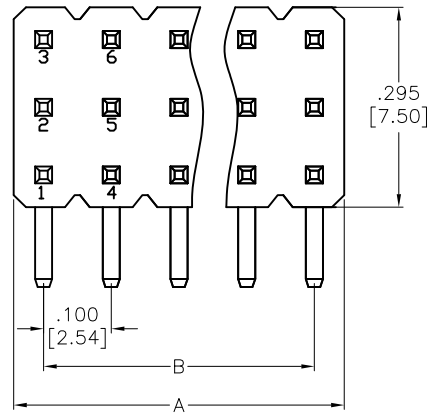

RECOMMENDED P.C.B LAYOUT

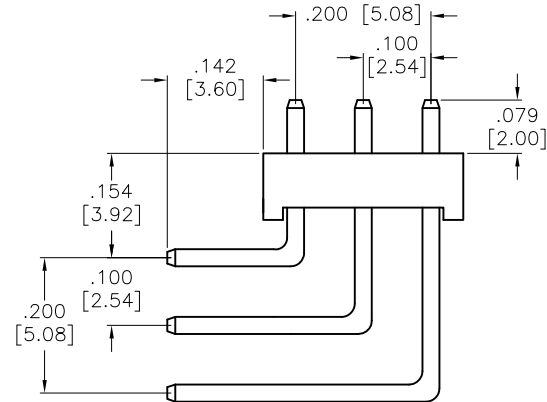

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Tin over Nickel underplate overall
 Electrical:
 Current rating: 3 Amp
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 500 VAC
 Temperature Rating:
 -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



Positions: 06 thru 120

A = .100 [2.54] x No. of Positions per Row - .012 [0.30]

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
APPROVALS			DATE			TITLE .100 [2.54] TRIPLE ROW PIN HEADER RIGHT ANGLE, TIN PLATED	
DRAWN		AY	2/15/19				
CHECKED		LW	2/15/19				
APPROVED							
SIZE X		PART NO. PH3RA-XX-T-.079/.142/.154-HT			REV. -		
REF: S00111C		SCALE: NTS		SHEET 1 OF 1			