

6

5

4

3

2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/18/18	

D

D

C





C

B

B

A

A

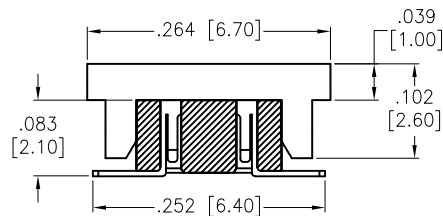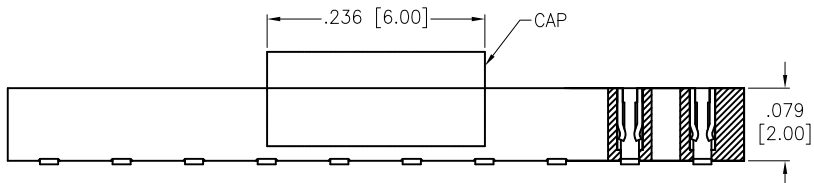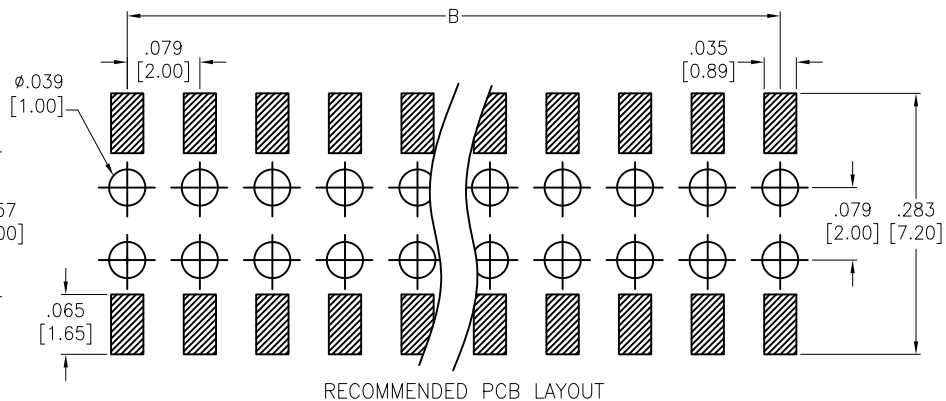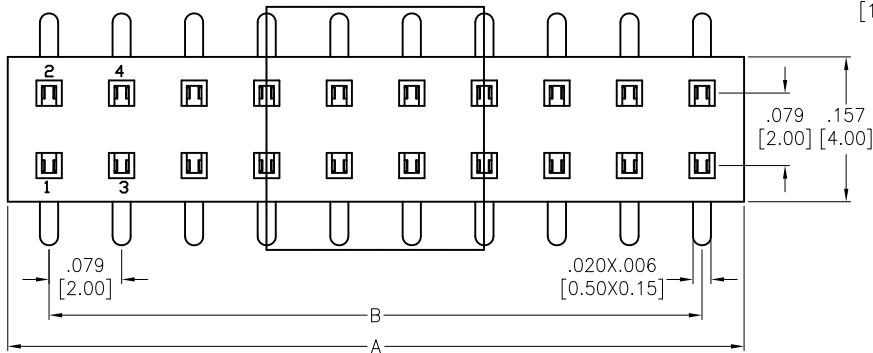

SPECIFICATIONS:

Material:  
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating:  
 Gold flash over Nickel underplate overall  
 Electrical:  
 Current rating: 2 Amp  
 Contact resistance: 20 mohms max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 500 VAC  
 Temperature Rating:  
 Operating temperature: -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

Positions: 04 thru 80

A = .079 [2.00] x No. of Positions per Row + .012 [0.30]

B = .079 [2.00] x No. of Space

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		<b>ADAM TECH</b>		909 Rahway Avenue, Union, NJ 07083	
INCHES HOLES		<b>INTERCONNECTS</b>		Phone: 908-687-5000 Fax: 908-687-5710	
.X ± .10	∅.X ± .10	TITLE: .079x.079 DUAL ROW RECEPTACLE STRIP			
.XX ± .020	∅.XX ± .015	.083 [2.10] HEIGHT, GOLD PLATED			
.XXX ± .015	∅.XXX ± .010	APPROVALS		DATE	
DRAWN	AY			7/18/18	
CHECKED	LW			7/18/18	
APPROVED					
SIZE	PART NO.	REF: S00111C		SCALE: NTS	SHEET 1 OF 1
X	2RS2GE-XX-G-SMT-PP-T/R				
REV.	-				

6

5

4

3

2

1