

6

5

4





3

2

1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/21/07	
A		REDRAWN	11/28/12	
B		UPDATE DIM.	3/13/17	AY/DH

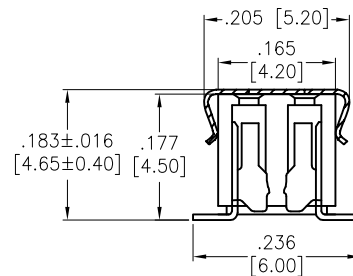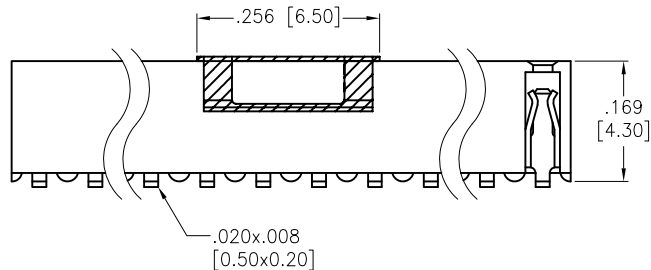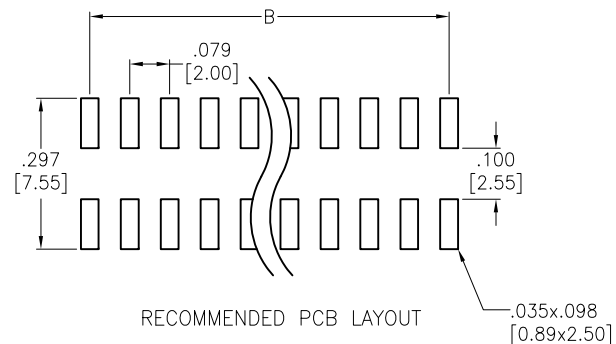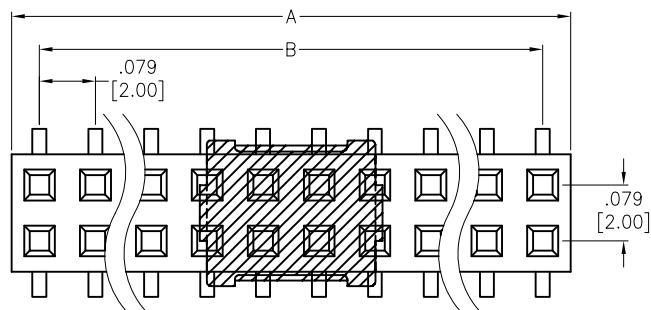

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Current rating: 1 Amp.
 Contact resistance: 20 mohms max.
 Insulation resistance: 5,000 Mohms min.
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 04 thru 80
 A = .079 [2.00] x No. of Positions per Row
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			
APPROVALS		TITLE .079 x .079 DUAL ROW RECEPTACLE STRIP .169 [4.30] HEIGHT, GOLD PLATED	
DRAWN	SS	DATE 6/21/07	
CHECKED		SIZE X	PART NO. 2RS2-XX-G-SMT-PP-T/R
APPROVED		REF: S00059T	SCALE: NTS SHEET 1 OF 1

6

5

4

3

2

1